

Safety information


- Use only the power supply provided with this product or the manufacturer's authorized replacement power supply.
- Connect the power supply cord to an electrical outlet that is near the product and easily accessible.

- Refer service or repairs, other than those described in the user documentation, to a professional service person.

CAUTION: Do not set up this product or make any electrical or cabling connections, such as the power supply cord or telephone, during a lightning storm.


1 Unpack your All-In-One.

Note: Contents may vary based on geography.

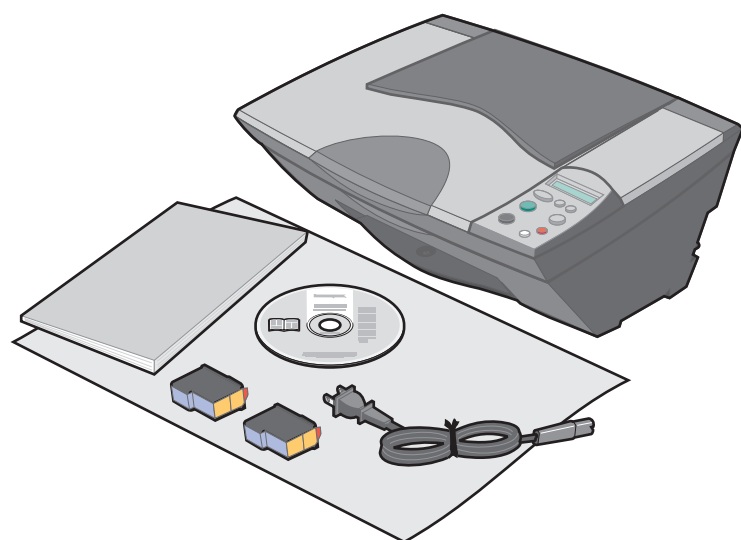


Note: You may need to purchase a USB cable separately.

Your All-In-One may include a photo cartridge instead of a black print cartridge.




Before you continue, remove the photo cartridge from the print cartridge storage unit.




Reminder: Save the print cartridge storage unit to protect unused cartridges.

2 Connect the power cord.

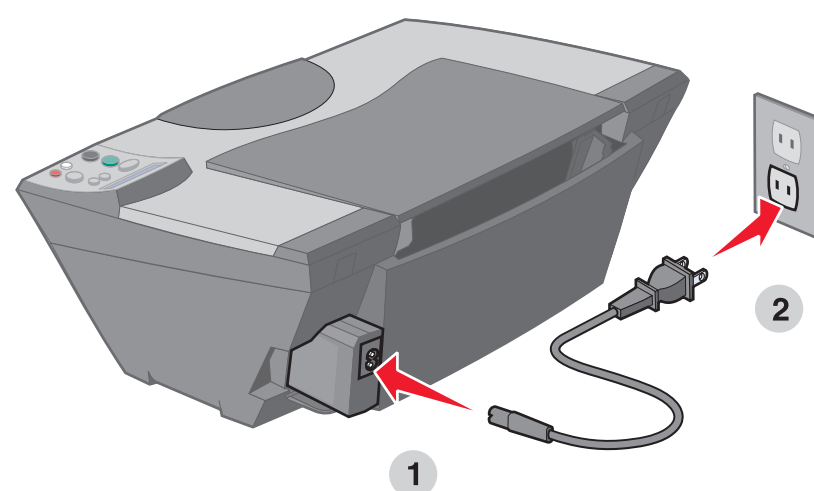


3 Make sure the Power light is on.

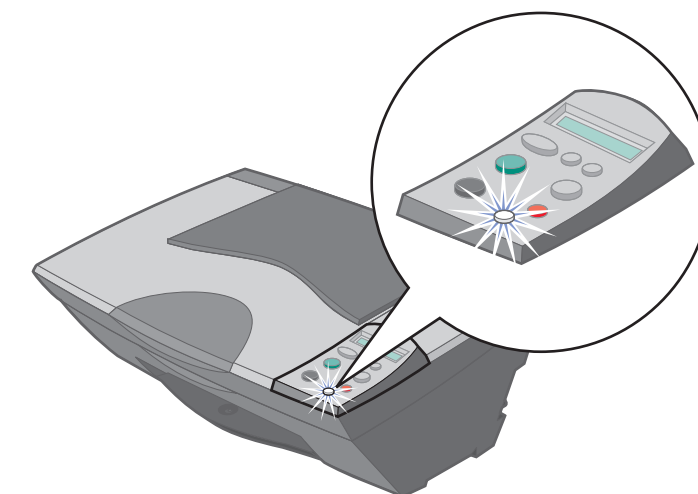


4 Press $\oplus$ to scroll to your *language* and then press $\rightarrow$.




5 Lift the paper support and extend the paper exit tray.

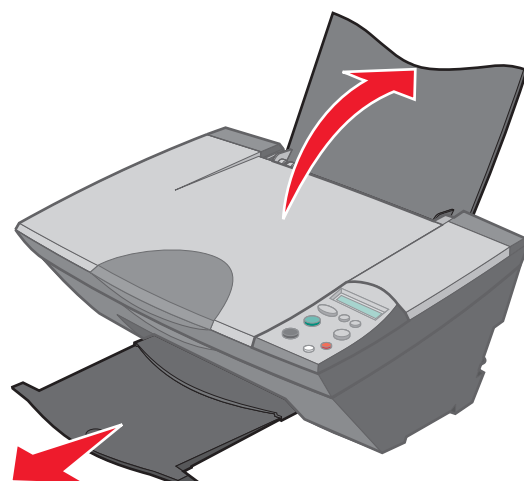


6 Load paper and adjust the paper guide.

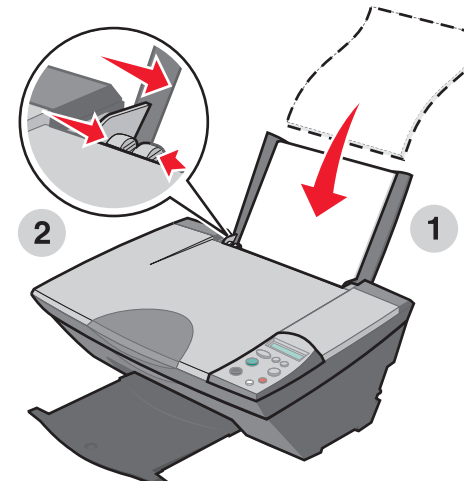


7 Lift the scanner unit.

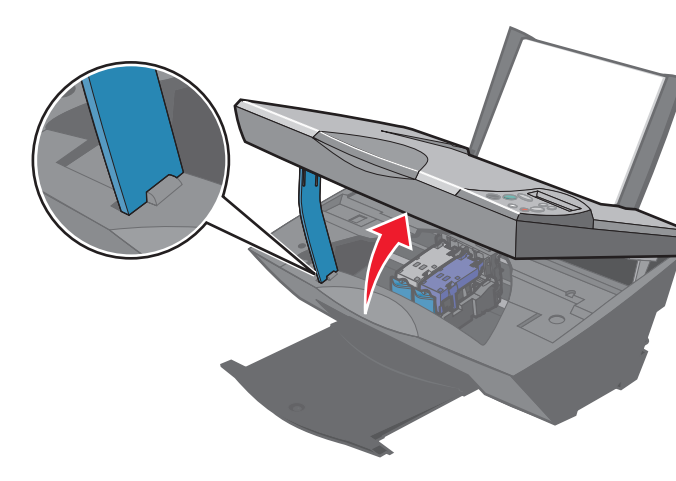



8 Remove the sticker and tape from the print cartridges.

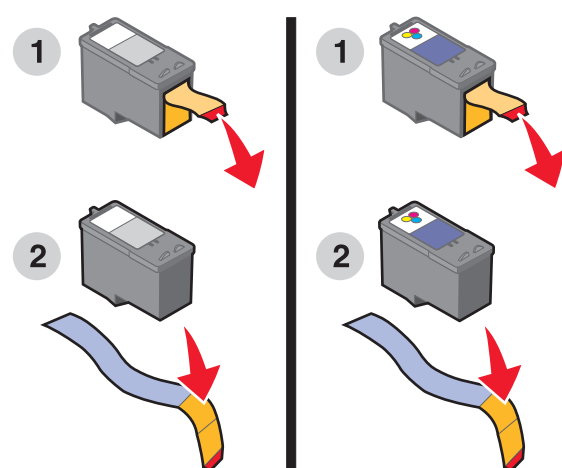


9 Open the cartridge lids, insert the cartridges, and snap the lids closed.

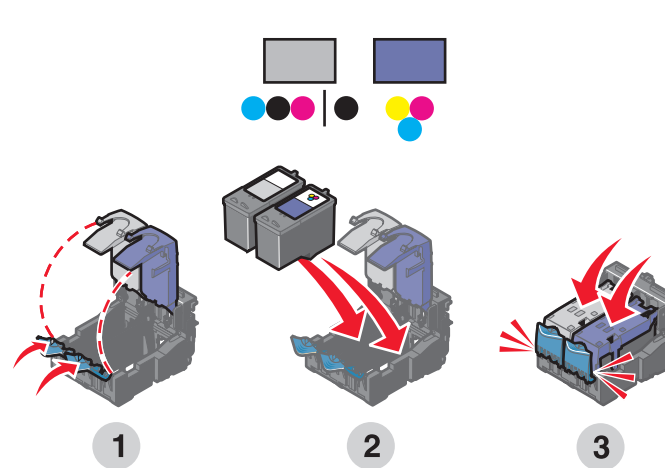

10 Close the scanner unit.

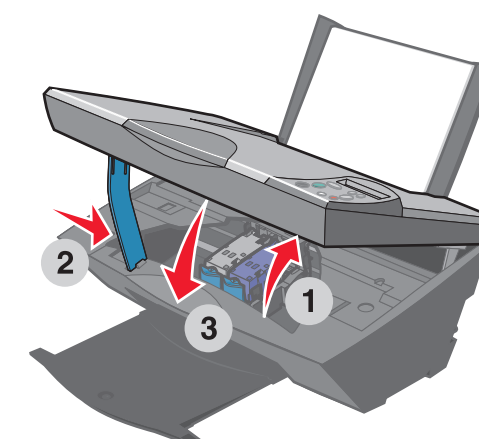

- 11** Press  to print an alignment page.




You may discard the alignment page after it prints.


If you are using your All-In-One **without** a computer, you are finished.

If you are using your All-In-One **with** a computer, continue to step 12.

- 12** Make sure your computer is on.

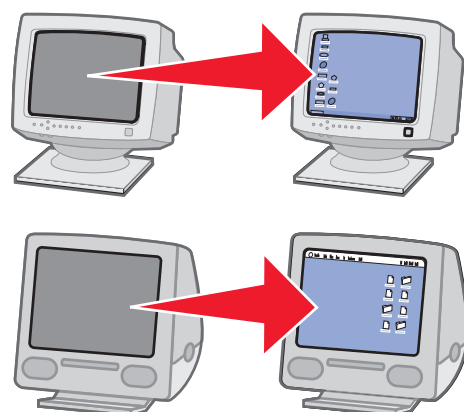


- 13** Connect the USB cable.

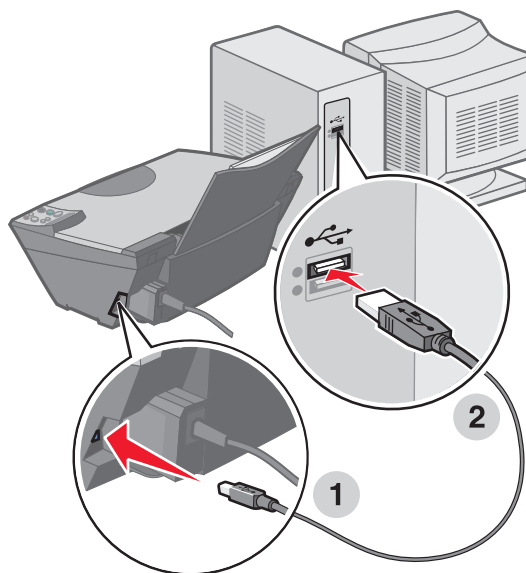

- 14** **Important!**


Click **Cancel** on *all* New Hardware screens.

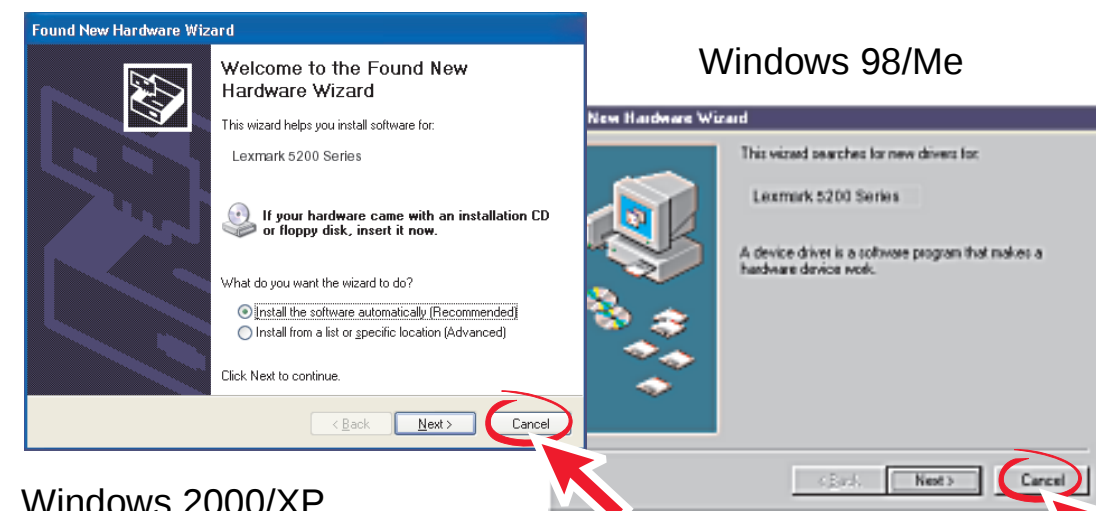

Windows 2000/XP

Note: New Hardware screens appear only for Windows users. For Macintosh, continue to step 15.

- 15** Insert the CD. Follow the instructions on your computer screen.

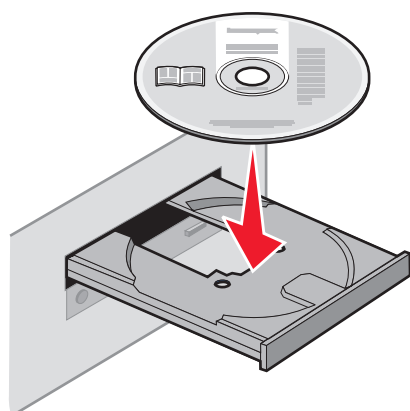

If you inserted the CD and the install screen did not appear (Windows):

- 1 Click **Cancel** on any New Hardware screens.
- 2 Eject and reinsert the All-In-One software CD.
If the All-In-One software install screen does not appear:
 - a From your desktop, double-click **My Computer** (In Windows XP, click **Start** → **My Computer**).
 - b Double-click the **CD-ROM drive** icon. If necessary, double-click **setup.exe**.
 - c When the All-In-One software installation screen appears, click **Install**.
 - d Follow the instructions on the screen.

If you inserted the CD and the install screen did not appear (Mac):

- 1 From your desktop, double-click the **Lexmark 5200 Series Installer** icon.
- 2 Double-click **Install** and follow the instructions on the screen.

Setup Troubleshooting

Symptom:	Diagnosis:	Solution:
The Power light is not lit	Is the power cord pushed all the way into the All-In-One?	Disconnect the power cord from the wall outlet, and then from the All-In-One. Reconnect the power cord by pushing it all the way into the connector on the All-In-One, and then into the wall outlet.
	Is the All-In-One connected to a working electrical outlet?	Connect the All-In-One to an electrical outlet that other electrical devices have been using.
Software will not install	Is your operating system compatible with the All-In-One?	The All-In-One supports these operating systems: • Windows 98 • Windows Me • Windows 2000 • Windows XP • Mac OS X version 10.1.5 • Mac OS X version 10.2.3 and later
Alignment page or test page will not print	Is the All-In-One on?	Press the Power button. If the Power light does not come on, see the "The Power light is not lit" symptom at the beginning of this table.
	Do you see an error message?	See "Error messages troubleshooting" in your <i>User's Guide</i> .
	Is your All-In-One connected to your computer through another device, such as a USB hub or switch box?	Disconnect the USB cable from any other devices and directly connect it between the All-In-One and your computer. For help, see step 13.
	Did you remove the sticker and tape from the bottom of each print cartridge? Are the print cartridges installed properly?	Remove the print cartridges, check for the sticker and tape and then reinsert them. For help, see step 8 and step 9.
	Is the paper loaded correctly?	See step 6.
The control panel displays text in the wrong language	Did you select a language?	1 Press the Power button to turn on the All-In-One. 2 Press and hold both the Power and Cancel buttons for 10 seconds. Language text appears on the display. 3 Press the + button repeatedly until the language you want appears on the display. 4 Press the Arrow button to select that language.

Have a question?

- Refer to your *User's Guide*.
- Visit our Web site: <http://support.lexmark.com/>.
- Call us at 1-800-332-4120.
Monday-Friday (9:00 AM - 9:00 PM EST)
Saturday (Noon-6:00 PM EST)
Note: Phone number and support times may change without notice.

Record the following information (located on your store receipt and the back of your printer) and have it ready when you contact us so that we may serve you faster:

Machine Type number _____

Serial number _____

Date purchased _____

Store where purchased _____

Need more ink?

The following cartridges work with your printer.

		
• 31	• 32 • 34	• 33 • 35