



# C540n, C543dn, C544n/dn/dw/dtn, X546dtn MFP

---

## Technical Reference

November 2010

[www.lexmark.com](http://www.lexmark.com)

---

Lexmark and Lexmark with diamond design are trademarks of Lexmark International, Inc., registered in the United States and/or other countries. All other trademarks are the property of their respective owners.

© 2010 Lexmark International, Inc.

All rights reserved.

740 West New Circle Road  
Lexington, Kentucky 40550

## **Edition notice**

November 2010

**The following paragraph does not apply to any country where such provisions are inconsistent with local law:** LEXMARK INTERNATIONAL, INC., PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions; therefore, this statement may not apply to you.

This publication could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in later editions. Improvements or changes in the products or the programs described may be made at any time.

References in this publication to products, programs, or services do not imply that the manufacturer intends to make these available in all countries in which it operates. Any reference to a product, program, or service is not intended to state or imply that only that product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any existing intellectual property right may be used instead. Evaluation and verification of operation in conjunction with other products, programs, or services, except those expressly designated by the manufacturer, are the user's responsibility.

For Lexmark technical support, visit [support.lexmark.com](http://support.lexmark.com).

For information on supplies and downloads, visit [www.lexmark.com](http://www.lexmark.com).

If you don't have access to the Internet, you can contact Lexmark by mail:

Lexmark International, Inc.  
Bldg 004-2/CSC  
740 New Circle Road NW  
Lexington, KY 40550  
USA

**© 2010 Lexmark International, Inc.**

**All rights reserved.**

## **Trademarks**

Lexmark and Lexmark with diamond design are trademarks of Lexmark International, Inc., registered in the United States and/or other countries.

StapleSmart is a trademark of Lexmark International, Inc.

PCL® is a registered trademark of the Hewlett-Packard Company. PCL is Hewlett-Packard Company's designation of a set of printer commands (language) and functions included in its printer products. This printer is intended to be compatible with the PCL language. This means the printer recognizes PCL commands used in various application programs, and that the printer emulates the functions corresponding to the commands.

All other trademarks are the property of their respective owners.

## **UNITED STATES GOVERNMENT RIGHTS**

This software and any accompanying documentation provided under this agreement are commercial computer software and documentation developed exclusively at private expense.

# Contents

<b>Edition notice.....</b>	<b>2</b>
<b>Introduction.....</b>	<b>5</b>
Understanding letters after model numbers.....	5
<b>Learning about the printer.....</b>	<b>7</b>
Finding information about the printer.....	7
<b>Printer Control Language (PCL) page formatting.....</b>	<b>8</b>
Printable areas.....	8
Supported paper and envelope dimensions.....	9
<b>Printer Job Language (PJL).....</b>	<b>11</b>
PJL commands information.....	11
<b>PostScript (PS) emulation.....</b>	<b>12</b>
Paper sizes supported.....	12
PostScript paper tray support.....	13
PostScript envelope size support.....	14
PostScript envelope tray support.....	15
<b>Printer specifications.....</b>	<b>17</b>
Airflow requirement.....	17
Noise emission levels.....	17
Electrical specifications.....	18
Power requirements.....	18
Physical specifications.....	19
Clearance requirements.....	20
Environmental conditions.....	20
Altitude specifications and atmospheric pressure.....	20
<b>Appendix A: PCL support.....</b>	<b>22</b>
PCL emulation commands.....	22
GL/2 commands.....	28

<b>Appendix B: PJL support.....</b>	<b>32</b>
Common variables for both printer languages.....	32
Lexmark-unique PJL variables for both printer languages.....	34
Common variables for PCL emulation.....	41
Printer-unique variables for PCL emulation.....	41
Common variables for PostScript emulation.....	42
Printer-unique variables for PostScript emulation.....	42
Printer-unique LRESOURCE variables.....	43
Status Readback commands.....	43
USTATUS unsolicited status variables.....	43
PJL messages for auto-continuable conditions.....	44
PJL messages for attendance conditions.....	50
PJL messages for paper handling.....	66
PJL messages for paper jams.....	69
Service errors.....	76
Device attendance messages.....	76
Lexmark-unique PJL commands.....	76
File and device protection commands.....	77
<b>Appendix C: PostScript support.....</b>	<b>79</b>
Supplemental operators.....	79
Page device parameters.....	82
User interpreter parameters.....	86
System interpreter parameters.....	87
Devices supported.....	90
Device parameters.....	92
PostScript message keys commands.....	101
<b>Index.....</b>	<b>102</b>

# Introduction

## Overview

This edition of the *Technical Reference* contains information about the following printers or multifunction printers (MFPs):

C540n  
C543dn  
C544n  
C544dn  
C544dw  
C544dtn  
X546dtn

## Understanding letters after model numbers

Some Lexmark printers may have one or more letters after the model name to indicate printer features:

Acronym	Meaning
d	duplex <sup>1</sup>
de	duplex and e-Task (electronic task) touch-screen interface
dfe	duplex, finisher/stapler, and e-Task touch-screen interface
dhe	duplex, high-capacity drawer, and e-Task touch-screen interface
dhn	duplex, high-capacity drawer, and network
dme	duplex, mailbox, and e-Task touch-screen interface
dn	duplex and network
dnf	duplex, network, and finisher/stapler
dnw or dw	duplex, network, and wireless
dt	duplex and additional tray <sup>2</sup>
dte	duplex, additional tray, and e-Task touch-screen interface
dtn	duplex, additional tray, and network
dttn	duplex, tandem tray module, and network
dtwe	duplex, additional tray, wireless, and e-Task touch-screen interface
e	e-Task touch-screen interface
hdn	hard disk, duplex, and network

<sup>1</sup> Duplex printing (two-sided printing) accomplished by means of an optional duplex unit or an internal duplex unit based on the product.

<sup>2</sup> The additional tray is part of a drawer.

Acronym	Meaning
n	network
nl	network light model
ni	network and ImageQuick
tn	network and additional tray

<sup>1</sup> Duplex printing (two-sided printing) accomplished by means of an optional duplex unit or an internal duplex unit based on the product.

<sup>2</sup> The additional tray is part of a drawer.

# Learning about the printer

## Finding information about the printer

### Setup information

Description	Where to find
The <i>Setup</i> information gives you instructions for setting up the printer. Follow the set of instructions for local, network, or wireless, depending on what you need.	You can find the <i>Setup</i> information on the inside of the printer box or on the Lexmark Web site at <a href="http://www.lexmark.com">www.lexmark.com</a> .

### Help

Description	Where to find
The Help gives you instructions for using the software.	While in any Lexmark software program, click <b>Help, Tips</b> → <b>Help</b> , or <b>Help</b> → <b>Help Topics</b> .

### Customer support

Description	Where to find (North America)	Where to find (rest of world)
<b>Telephone support</b>	Call us at <ul style="list-style-type: none"><li>• US: 1-800-332-4120 Monday–Friday (8:00 AM–11:00 PM ET) Saturday (Noon–6:00 PM ET)</li><li>• Canada: 1-800-539-6275 Monday–Friday (8:00 AM–11:00 PM ET) Saturday (Noon–6:00 PM ET)</li><li>• Mexico: 001-888-377-0063 Monday–Friday (8:00 AM–8:00 PM ET)</li></ul> <p><b>Note:</b> Telephone numbers and support times may change without notice. For the most recent telephone numbers available, see the printed warranty statement that came with your printer.</p>	Telephone numbers and support hours vary by country or region. Visit our Web site at <a href="http://www.lexmark.com">www.lexmark.com</a> . Select a country or region, and then select the Customer Support link. <b>Note:</b> For additional information about contacting Lexmark, see the printed warranty that came with your printer.
<b>E-mail support</b>	For e-mail support, visit our Web site: <a href="http://www.lexmark.com">www.lexmark.com</a> . <ol style="list-style-type: none"><li>1 Click <b>SUPPORT</b>.</li><li>2 Click <b>Technical Support</b>.</li><li>3 Select your printer type.</li><li>4 Select your printer model.</li><li>5 From the Support Tools section, click <b>e-Mail Support</b>.</li><li>6 Complete the form, and then click <b>Submit Request</b>.</li></ol>	E-mail support varies by country or region, and may not be available in some instances. Visit our Web site at <a href="http://www.lexmark.com">www.lexmark.com</a> . Select a country or region, and then select the Customer Support link. <b>Note:</b> For additional information about contacting Lexmark, see the printed warranty that came with your printer.


# Printer Control Language (PCL) page formatting

For more information on PCL, refer to the *Printer Languages and Interfaces Technical Reference*. It contains a complete listing with descriptions of PCL commands.

To determine which PCL commands your printer supports, see “Appendix A: PCL support” on page 22.

## Printable areas

The printable areas and logical pages for PCL emulation (both portrait and landscape orientation) are illustrated below. See the legend that follows for definitions of areas A through I.

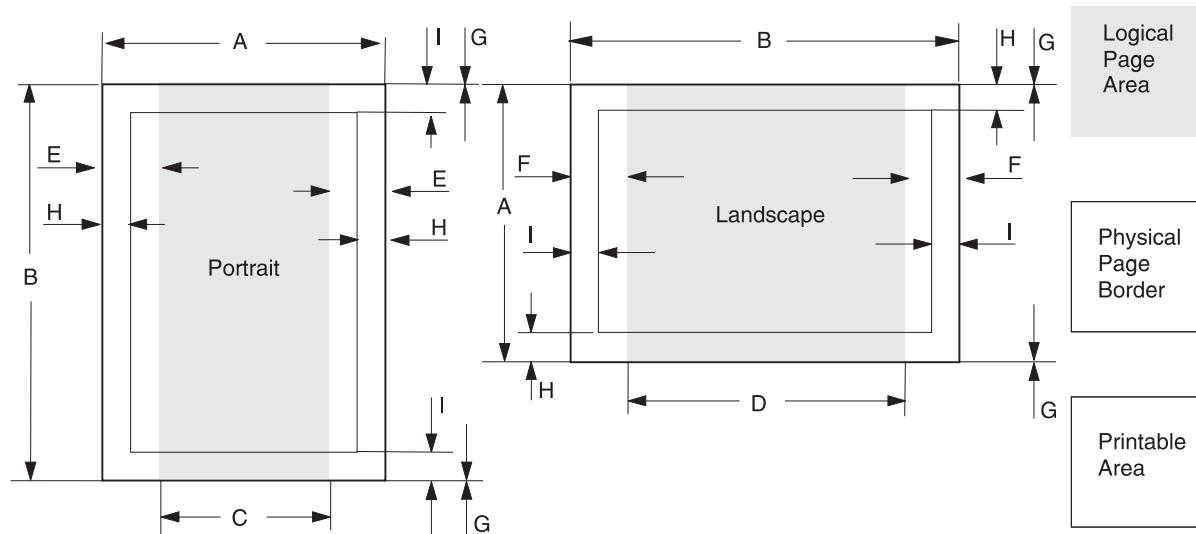

### Legend:

A	Portrait physical page width and landscape physical page length
B	Portrait physical page length and landscape physical page width
C	Portrait logical page width
D	Landscape logical page width
E	Distance between the side edge of the physical page and the logical page in portrait
F	Distance between the side edge of the physical page and the logical page in landscape
G	Distance between the top and bottom edge of the physical page and logical page
H	Distance between the left and right edge of the physical page and the printable area in portrait, or distance between the top and bottom edge of the physical page and printable area in landscape
I	Distance between the top and bottom edge of the physical page and the printable area in portrait, or distance between the left and right edge of the physical page and the printable area in landscape

**Note:** The tables that follow in this chapter list the page sizes and dimensions of each area labeled on the preceding diagram for all paper and envelope sizes your printer supports.

# Supported paper and envelope dimensions

The following table lists the page sizes and print area dimensions for all supported paper and envelope sizes. For more information about the printable areas and logical pages for PCL emulation, see “Printable areas” on page 8.

Selection		Paper/envelope dimensions		Dimensions by area (pels) <sup>1</sup>									
Page size parameters <sup>2</sup>	Name	mm	inches	A	B	C	D	E	F	G	H	I	
<b>Paper</b>													
2,602	Letter	216 x 279	8.5 x 11	5100	6600	4800	6360	150	120	0	200	200	
3,603	Legal	216 x 356	8.5 x 14	5100	8400	4800	8160	150	120	0	200	200	
12,45,612	JIS B5	182 x 257	7.2 x 10.1	4300	6070	4000	5830	150	120	0	200	200	
26,626	A4 (198 mm) <sup>3</sup>	210 x 297	8.3 x 11.7	4960	7014	4676	6778	142	118	0	160	200	
26,626	A4 (203 mm) <sup>3</sup>	210 x 297	8.3 x 11.7	4960	7014	4676	6778	80	118	0	160	200	
1,601	Exec	184 x 267	7.25 x 10.5	4350	6300	4050	6060	150	120	0	200	200	
13,613	A5	148 x 210	5.83 x 8.27	3496	4960	3196	4720	142	118	0	200	200	
300	Oficio (Mexico)	216 x 340	8.5 x 13.4	5100	8040	4800	7800	150	120	0	200	200	
4 or 10	Folio	216 x 330	8.5 x 13	5100	7800	4800	7560	150	120	0	200	200	
101	Universal	216 x 356	8.5 x 14	1800-5100 <sup>4</sup>	1800-8502 <sup>4</sup>	1500-4800 <sup>4</sup>	1500-8202 <sup>4</sup>	75	60	0	100	100	
<b>Envelope</b>													
90	DL	220 x 110	8.66 x 4.33	2598	5196	2314	4960	142	118	0	200	200	

<sup>1</sup> Pel dimensions are for 600 dpi.

<sup>2</sup> Page Size Parameters are explained in the Page Control table in the PCL chapter in the *Printer Language and Interfaces Technical Reference*.

<sup>3</sup> The width of the logical page for A4 paper can be changed from the printer control panel or your software application.

<sup>4</sup> For the Universal paper size, the area dimensions are listed in pel ranges.

<sup>5</sup> Paper ID 99 will be supported for backward compatibility with other Lexmark printers. Paper ID 99 has the same logical paper size as ID 100 (compatible with HP LaserJet 5Si/5SiMx) but is 8 pels wider than the Lexmark 4039.

**Note:** The explanation of the printable area assumes the Print Area menu item is set to Normal. For more information, see “Print Area Menu Item” in the PCL chapter in the *Printer Language and Interfaces Technical Reference*.

Selection		Paper/envelope dimensions		Dimensions by area (pels) <sup>1</sup>									
Page size parameters <sup>2</sup>	Name	mm	inches	A	B	C	D	E	F	G	H	I	
91	C5	229 x 162	9.02 x 6.38	3826	5408	3542	5172	142	118	0	200	200	
99 <sup>d</sup> , 100	B5 Envelope	250 x 176	9.84 x 6.93	4156	5904	3872	5668	142	118	0	200	200	
600	Other Envelope	229 x 356	9 x 14	5100	8400	4800	8160			0	200	200	
89	9 (Com 9)	98 x 225	8.875 x 3.875	2324	5324	2024	5084	150	120	0	200	200	
81	10 (Com 10)	241 x 105	9.5 x 4.125	2474	5700	2174	5460	150	120	0	200	200	
80	7 3/4 (Monarch)	98 x 191	3.875 x 7.5	2324	4500	2024	4260	150	120	0	200	200	

<sup>1</sup> Pel dimensions are for 600 dpi.

<sup>2</sup> Page Size Parameters are explained in the Page Control table in the PCL chapter in the *Printer Language and Interfaces Technical Reference*.

<sup>3</sup> The width of the logical page for A4 paper can be changed from the printer control panel or your software application.

<sup>4</sup> For the Universal paper size, the area dimensions are listed in pel ranges.

<sup>5</sup> Paper ID 99 will be supported for backward compatibility with other Lexmark printers. Paper ID 99 has the same logical paper size as ID 100 (compatible with HP LaserJet 5Si/5SiMx) but is 8 pels wider than the Lexmark 4039.

**Note:** The explanation of the printable area assumes the Print Area menu item is set to Normal. For more information, see “Print Area Menu Item” in the PCL chapter in the *Printer Language and Interfaces Technical Reference*.

# Printer Job Language (PJL)

## PJL commands information

Your printer supports complete PJL commands, including certain commands that cause the printer to enter PCL emulation, PostScript emulation, and Personal Printer Data Stream (PPDS).

For a complete listing with descriptions of PJL commands, see the *Printer Languages and Interfaces Technical Reference*.

To determine which commands your printer supports, see “Appendix B: PJL support” on page 32.

# PostScript (PS) emulation

Your printer supports complete PostScript emulation supplemental operators. For full descriptions in detail for these operators, refer to the PostScript emulation chapter in the Printer Languages and Interfaces Technical Reference.

To determine which commands your printer supports, see “Appendix C: PostScript support” on page 79.

## Paper sizes supported

✓ = Supported ✗ = Not supported <b>Paper sizes</b>					<b>Printer models</b>	
<b>Size</b>	<b>Literal name</b>	<b>Size (mm)</b>	<b>Size (inches)</b>	<b>Size (points)</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
Letter	letter	215.9 x 279.4	8.5 x 11.0	612 x 792	✓	✓
Legal	legal	215.9 x 355.6	8.5 x 14.0	612 x 1008	✓	✓
JIS B5	b5*	182.0 x 257.0	7.2 x 10.1	516 x 729	✓	✓
A4	a4	210.0 x 297.0	8.3 x 11.7	595 x 842	✓	✓
Executive	executive page	184.2 x 266.7	7.25 x 10.5	522 x 756	✓	✓
A5	a5	148.0 x 210.0	5.83 x 8.27	419 x 595	✓	✓
11 x 17	ledger	431.8 x 279.4	17 x 11	1224 x 792	✗	✗
Oficio	oficio	215.9 x 340.4	8.5 x 13.4	612 x 965 (Lexmark unique size) 612 x 972 (official PostScript size)	✓	✓
Folio	folio	215.9 x 330.2	8.5 x 13.0	612 x 936	✓	✓
Universal	universal	216 x 356	8.5 x 14	612 x 1008	✓	✓

\* This is a Japanese Industry Standard (JIS) paper size. The same named designation is used by JIS and International Standards Organization (ISO) for different paper sizes.

# PostScript paper tray support

When the printer receives one of the operators listed in “Tray selected with tray operators” on page 13, it performs the actions listed as follows. This paper tray selection process ends as soon as a suitable paper source is chosen and paper is fed from this tray.

- The printer checks the value of **manualfeed** in **statusdict** and the **ManualFeed** page device parameter. If either one is true, the printer sends a message to load the requested size in the manual feed tray or multipurpose feeder.
- The **PageSize Policy** is set to 0 by means of **setpagedevice**.
- The printer checks the paper size loaded in the current active source to determine if it matches the requested size. If the sizes match, the paper is fed from the active source.

**Note:** The current active tray is the last source that was selected from the printer control panel or by the printer language.

- If the requested size and the size loaded in the active source do not match, the sources are searched in the order defined by the **Priority** array in the **InputAttributes** dictionary in the **pagedevice** dictionary.
- If the requested media size is not found by the previous search, the following search order is used:
  - Tray 1
  - Optional 650-sheet duo drawer (Tray 2)
  - Optional 550-sheet tray (Tray 3)
  - Multipurpose feeder
- If the requested size cannot be located in any automatic source, a **configurationerror** is issued and the job is flushed.

For printers that support automatic duplexing:

- Automatic duplexing is not supported for custom-size paper or for envelopes in the multipurpose feeder. Automatic duplexing is supported from the multipurpose feeder for all other papers.
- If the paper source is changed before the back side of a duplexed page prints, a blank back page prints, the paper source changes, and the information for the back side of the page is printed on the front side of a page sent from the new paper source.

When these operators are used, it is equivalent to executing the following PostScript emulation sequence:

```
<< /PageSize [x y] /ImagingBBox null /Policies << /PageSize 0>> >>
```

```
setpagedevice
```

where x y are the **PageSize** in points.

## Tray selected with tray operators

✓ = Supported ✗ = Not supported		Printer models	
Operator	Tray selected (corresponding image size is set)	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
a4tray	tray with A4-size paper	✓	✓
a5tray	tray with A5-size paper	✓	✓
b5tray	tray with B5-size paper	✓	✓
customtray	tray with custom-size paper	✗	✗
executivetray	tray with executive-size paper	✓	✓

✓ = Supported ✗ = Not supported		Printer models	
Operator	Tray selected (corresponding image size is set)	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
foliotray	tray with folio-size paper	✓	✓
ledgertray	tray with 279.4 x 431.8-mm (11 x 17-in.) paper with landscape orientation	✗	✗
legaltray	tray with legal-size paper	✓	✓
lettertray	tray with letter-size paper	✓	✓
oficiotray	tray with oficio-size paper	✓	✓

## PostScript envelope size support

The literal names in “Envelope sizes supported” on page 14 are also supported as operators in **userdict**. These operators change the image size, but do not change the active paper source. Therefore, when these operators are used, part of the image may be clipped.

When these literal names are used as operators, it is equivalent to executing the following PostScript emulation sequence. The following example uses a 3.875 x 7.5 envelope.

```
<</Policies <</PageSize 7>> /PageSize [279 540]>> >>setpagedevice
```

### Envelope sizes supported

✓ = Supported ✗ = Not supported					Printer models	
Envelope sizes					C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
Size name	Literal name	Size (mm)	Size (inches)	Size (points)	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
7 3/4	3.875x7.5envelope	98.4 x 190.5	3.875 x 7.5	279 x 540	✓	✓
Commercial 9	3.875x8.875envelope	98.4 x 225.4	3.875 x 8.875	279 x 639	✓	✓
Commercial 10	4.125x9.5envelope	104.8 x 241.3	4.125 x 9.5	297 x 684	✓	✓
International DL	110x220envelope	110 x 220	4.33 x 8.66	312 x 624	✓	✓
International C5	162x229envelope	162 x 229	6.38 x 9.01	459 x 649	✓	✓
International B5	176x250envelope	176 x 250	6.93 x 9.84	499 x 708	✓	✓
Other envelope	otherenvelope	229.11 x 355.6	9.02 x 14	612 x 996	✓	✓

Envelope sizes					Printer models	
Size name	Literal name	Size (mm)	Size (inches)	Size (points)	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
otherenvelope	Other	296.93 x 427.48	11.69 x 16.83	841 x 842	x	x

### Literal names supported

Literal names		Printer models	
Literal name	Compatible literal name	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
monarchenvelope	3.875x7.5envelope	✓	✓
com10envelope	4.125x9.5envelope	✓	✓
dlenvelope	110x220envelope	✓	✓
c5envelope	162x229envelope	✓	✓
b5envelope	176x250envelope	✓	✓

## PostScript envelope tray support

If **manualfeed** in **statusdict** and the **ManualFeed** page device parameter are false when the printer receives one of the envelopetray operators listed in “Envelopetray operator selections” on page 16, then the printer:

- Sets the **PageSize Policy** to 0.
- Checks the active source to see if it matches the requested envelope size. If the sizes match, the envelope is fed from the active source.

**Note:** The active source is the last source selected from the printer control panel or data stream.

- If the requested size and the size loaded in the active source do not match, the sources are searched in the order defined by the **Priority** array in the **InputAttributes** dictionary in the **pagedevice** dictionary.
- If the requested media size is not found by the previous search, the following search order is used:
  - Envelope Feeder
  - Multipurpose Feeder
- If the requested size and type are not available from any automatic source, you are prompted to load the requested envelope size and type in the manual feed source.
- If the size is still not available, a **configurationerror** is issued and the print job is flushed.

If **manualfeed** or **ManualFeed** is true, the printer prompts you to load the requested size manually. If no manual feed exists on the printer, a **rangecheck** error message is generated

The envelope tray the printer selects when it receives an **envelopetray** operator is listed in “Envelopetray operator selections” on page 16. These operators are equivalent to executing the following PostScript emulation sequence:

```
<</PageSize [x y] /ImagingBBox null /Policies<</PageSize 0>> >>
setpagedevice
```

where **x y** are the PageSize in points.

### Envelopetray operator selections

Tray operators		Printer models	
Operator	Tray selected (Corresponding image size is set)	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
110x220envelopetray	tray with 110 x 220 size envelopes	✓	✓
dlenvelopetray	tray with 110 x 220 size envelopes	✓	✓
162x229envelopetray	tray with 162 x 229 size envelopes	✓	✓
c5envelopetray	tray with 162 x 229 size envelopes	✓	✓
176x250envelopetray	tray with 176 x 250 size envelopes	✓	✓
b5envelopetray	tray with 176 x 250 size envelopes	✓	✓
3.875x7.5envelopetray	tray with 3.875 x 7.5 size envelopes	✓	✓
monarcenvelopetray	tray with 3.875 x 7.5 size envelopes	✓	✓
3.875x8.875envelopetray	tray with 3.875 x 8.875 size envelopes	✓	✓
4.125x9.5envelopetray	tray with 4.125 x 9.5 size envelopes	✓	✓
com10envelopetray	tray with 4.125 x 9.5 size envelopes	✓	✓
otherenvelopetray	tray with other size envelopes	✓	✓

# Printer specifications

This chapter lists printer specifications and information about hardware, environmental conditions, and power requirements.

## Airflow requirement

The room should meet ASHRAE 62—1989 standards.

## Noise emission levels

The following measurements were made in accordance with ISO 7779 and reported in conformance with ISO 9296.

### C54x Color Laser Series

Status	1-meter average sound pressure, dBA			
	C540n	C543dn	C544n	C544dn, C544dw, C544dtn
Printing (Simplex)	47	47	49	49
Printing (Auto duplex)	Inapplicable	50	Inapplicable	51
Standby (Idle without Power Saver)	Inaudible	Inaudible	Inaudible	Inaudible
Quiet Mode (Simplex)	46	46	46	46

**Note:** Measurements apply to 300-dpi, 600-dpi, and 1200-dpi printing.

### X546dtn MFP

Status	1-meter average sound pressure, dBA	Declared sound power levels, Bels
Printing (Simplex Mono)	47	6.2
Printing (Simplex Color)	48	6.3
Printing (Duplex Mono)	50	6.5
Printing (Duplex Color)	51	6.5
Copy (ADF Mono)	49	6.4
Copy (ADF Color)	50	6.5
Scan (ADF Mono)	45	6.1
Scan (ADF Color)	45	6.1
Standby (Idle without Power Saver)	Inaudible	Inaudible
Quiet Mode (Simplex Mono)	45	5.9
Quiet Mode (Simplex Color)	45	6.0

**Note:** Measurements apply to 300-dpi, 600-dpi, and 1200-dpi printing.

# Electrical specifications

Printer model	Electrical specification
C54x low voltage models*	100–127 V at 47–63 Hz, nominal 90–137 V, extreme
C54x 100 volt model	100 V at 47–63 Hz, nominal 90–110 V, extreme
C54x high voltage models	220–240 V at 47–63 Hz (not available in all countries) 198–259 V, extreme
X546dtn MFP low voltage models	100–110 V (Japan) at 50–60 Hz, nominal 100–127 V at 50–60 Hz, nominal 90–110 V (Japan), extreme 90–137 V, extreme
X546dtn MFP high voltage models	220–240 V at 50–60 Hz, nominal (not available in all countries) 198–264 V, extreme

\* Using a 220–110 power converter with 110 V printer is not recommended.

**Warning—Potential Damage:** Lexmark recommends that you do not use voltage converters with printers.

## Power requirements

The following tables list the nominal average power requirements (including fuser power).

### Lexmark C54x nominal average power requirements

Printing states	C540n, C543dn	C544n, C544dn, C544dw, C544dtn
<b>Average power while printing continuously</b>		
1-sided (simplex)	480 W	500 W
2-sided (duplex)	340 W	340 W
<b>Average power while idle</b>		
Power Saver on	18 W	18 W
Ready mode	34 W	36 W
<b>Max current while printing</b>		
100–110 V	8.7 A	8.7 A
110–127 V	7.6 A	7.6 A
220–240 V	4.1 A	4.1 A
<b>Note:</b> Automatic duplex is not supported on the C540n and C544n.		

## Lexmark X546dtn MFP nominal average power requirements

Printing states	X546dtn
Printing continuously (simplex)	540 W
Printing continuously (duplex)	370 W
Copying continuously	510 W
Scanning	60 W
Average power while idle	
Power Saver Mode/Sleep Mode	23 W
Standby Mode	50 W
Max (Average) current while printing	
100--110 V	8.1 A
115--127 V	7.0 A
220--240 V	3.6 A

## Physical specifications

### Lexmark C54x dimensions

	Height	Width	Depth	Weight
C540n	291.2 mm (11.5 in.)	423.9 mm (16.7 in.)	399.7 mm (15.7 in.)	21 kg (46.2 lb)
C543dn				
C544n				
C544dn				
C544dw				
C544dtn	422.3 mm (16.6 in.)	423.9 mm (16.7 in.)	416.4 mm (16.4 in.)	25 kg (54.9 lb)
C544dtn with optional 650-sheet duo drawer				

### Input option for Lexmark C54x Models

Option name	Height	Width	Depth	Weight
650-sheet duo drawer	133 mm (5.2 in.)	423.9 mm (16.7 in.)	416.4 mm (16.4 in.)	4 kg (8.7 lb)

### Lexmark X546dtn MFP dimensions

	Height	Width	Depth	Weight
X546dtn	569 mm (23.5 in.)	440 mm (17.32 in.)	537 mm (21.14 in.)	31.37 kg (69.15 lb)
X546dtn with optional 650-sheet duo drawer	133 mm (5.2 in.)	423.9 mm (16.7 in.)	416.4 mm (16.4 in.)	4.16 kg (9.15 lb)
X546dtn with optional 550-sheet drawer	133 mm (5.2 in.)	423.9 mm (16.6 in.)	416.4 mm (16.4 in.)	4.16 kg (9.15 lb)

# Clearance requirements

## Lexmark C540n, C543dn, C544n/dn/dw/dtn

Model	Left side	Right side	Front	Rear	Top
C540n, C543dn, C544n, C544dn, C544dw	76.2 mm (3 in.)	152.4 mm (6 in.)	508 mm (20 in.)	101.6 mm (4 in.)	254 mm (10 in.)
C544dtn	76.2 mm (3 in.)	254 mm (10 in.)	508 mm (20 in.)	101.6 mm (4 in.)	254 mm (10 in.)

**Note:** Allow an additional 133 mm (5.2 in.) clearance above the C54x for an optional drawer.

## Lexmark X546dtn MFP

Model	Left side	Right side	Front	Rear	Top
X546dtn	76.2 mm (3 in.)	254 mm (10 in.)	508 mm (20 in.)	101.6 mm (4 in.)	360 mm (14 in.)

**Note:** Allow an additional 133 mm (5.2 in.) clearance above the X546dtn for an optional input drawer.

# Environmental conditions

**Note:** When shipping or storing printers, always pack the printer supplies (cartridges and photoconductors, for example) separately.

## Air temperature ranges

Printer model	Operating value	Shipping value	Storage (unpacked)
C540n, C543dn, C544n/dn/dw/dtn	15.6–32.2°C (60–90°F)	-40–43.3°C (-40–110°F)	0–40°C (32–104°F)
X546dtn MFP	15.6–32.2°C (60–90°F)	-40–43.3°C (-40–110°F)	0–40°C (32–104°F)

## Humidity ranges

Printer model	Operating value	Shipping value	Storage value
C540n, C543dn, C544n/dn/dw/dtn	8%–80%*	8%–80%	8%–80%
X546dtn MFP	8%–80%*	8%–80%	8%–80%

\* Approaching 32°C (90°F) the maximum relative humidity is 60%.

# Altitude specifications and atmospheric pressure

## Altitude specifications

Printer model	Altitude (above sea level)	
	Operating	Shipping/storage
C540n, C543dn, C544n/dn/dw/dtn	0–3048 M (10,000 ft.)	10,300 M (34,000 ft.)
XC546dtn MFP	0–3048 M (10,000 ft.)	10,300 M (34,000 ft.)

## **Atmospheric Pressure**

74.6 kPa

# Appendix A: PCL support

## PCL emulation commands

✓ = Supported ✗ = Not supported		Printer model	
Command	Function	C540n, C543dn, C544n, C544dn,C544dw, C544dtn	X546dtn
Decimal 8	BS, Backspace	✓	✓
Decimal 9	HT, Horizontal Tab	✓	✓
Decimal 10	LF, Line Feed	✓	✓
Decimal 12	FF, Form Feed	✓	✓
Decimal 13	CR, Carrier Return	✓	✓
Decimal 14	SO, Select Secondary Font	✓	✓
Decimal 15	SI, Select Primary Font	✓	✓
Decimal 32	SP, Space	✓	✓
ESC E	Printer Reset	✓	✓
ESC Y	Display Functions-On	✓	✓
ESC Z	Display Functions-Off	✓	✓
ESC Z	Print Test Page	✗	✗
ESC &#C	Horizontal Cursor Position (in Columns)	✓	✓
ESC &#G	Duplex Page Side Selection	✓	✓
ESC &#H	Horizontal Cursor Position (in Decipoints)	✓	✓
ESC &#L	Set Left Margin	✓	✓
ESC &#M	Set Right Margin	✓	✓
ESC &#N	Negative Motion	✗	✗
ESC &#P	Print Direction	✓	✓
ESC &#R	Vertical Cursor Position (in Rows)	✓	✓
ESC &#V	Vertical Cursor Position (in Decipoints)	✓	✓

✓ = Supported ✗ = Not supported		Printer model	
Command	Function	C540n, C543dn, C544n, C544dn,C544dw, C544dtn	X546dtn
ESC&b#M	Monochrome Print Mode	✓	✓
ESC&b#W[data]	Configuration Command	✗	✗
ESC&c#T	Character Text Path Direction	✓	✓
ESC&d@	Underline-Disable	✓	✓
ESC&d#A	Number of Collated Copies	✓	✓
ESC&d#D	Underline-Enable	✓	✓
ESC&f#F	Set Universal Height	✓	✓
ESC&f#G	Set Universal Width	✓	✓
ESC&f#O	Set Universal Feed Direction	✓	✓
ESC&f#W	Set Universal Custom Name	✓	✓
ESC&f#S	Push / Pop Cursor Position	✓	✓
ESC&f#X	Macro Control	✓	✓
ESC&f#Y	Set Macro ID	✓	✓
ESC&k#G	Set Line Termination	✓	✓
ESC&k#H	Set Horizontal Motion Index	✓	✓
ESC&k#S	Select Primary and Secondary Pitch	✓	✓
ESC&k#W	Text Scale Mode	✗	✗
ESC&l#A	Set Page Size	✓	✓
ESC&l#C	Set Vertical Motion Index	✓	✓
ESC&l#D	Set Line Spacing	✓	✓
ESC&l#E	Set Top Margin	✓	✓
ESC&l#F	Set Text Length	✓	✓
ESC&l#G	Set Output Bin	✓	✓
ESC&l#H	Paper Source	✓	✓
ESC&l#L	Skip Perforation	✓	✓
ESC&l#O	Select Orientation	✓	✓

✓ = Supported ✗ = Not supported		Printer model	
Command	Function	C540n, C543dn, C544n, C544dn,C544dw, C544dtn	X546dtn
ESC&{M(b)	Paper Type	✗	✗
ESC&{P	Set Page Length	✓	✓
ESC&{S	Simplex/Duplex Print	✓	✓
ESC&{U	Long-Edge Offset Registration	✓	✓
ESC&{X	Number of Copies	✓	✓
ESC&{Z	Short-Edge Offset Registration	✓	✓
ESC&{1T	Job Separation	✗	✗
ESC&n#W [operation] [string id]	Alphanumeric ID	✓	✓
ESC&p#C	Palette Control	✓	✓
ESC&p#I	Palette Control ID	✓	✓
ESC&p#S	Select Palette	✓	✓
ESC&p#X[data]	Transparent Print Data	✓	✓
ESC&r#F	Flush All Pages	✓	✓
ESC&s#C	End-Of-Line Text Wrap	✓	✓
ESC&t#P	Text Parsing Method	✓	✓
ESC&u#D	Unit of Measure	✓	✓
ESC(#	Primary Font Symbol Set	✓	✓
ESC(#X	Select Primary Download Font (by Font ID)	✓	✓
ESC(3@	Select Default Primary Font	✓	✓
ESC(f#W[data]	Define Symbol Set	✓	✓
ESC(s#B	Primary Font Stroke Weight	✓	✓
ESC(s#H	Primary Font Pitch	✓	✓
ESC(s#P	Primary Font Spacing	✓	✓
ESC(s#S	Primary Font Style	✓	✓
ESC(s#T	Primary Font Typeface Selection	✓	✓

✓ = Supported ✗ = Not supported		Printer model	
Command	Function	C540n, C543dn, C544n, C544dn,C544dw, C544dtn	X546dtn
ESC(s#V	Primary Font Height (Point Size)	✓	✓
ESC(s#W[data]	Load Character	✓	✓
ESC)#+	Secondary Font Symbol Set	✗	✗
ESC)#+X	Select Secondary Download Font (by Font ID)	✗	✗
ESC)3@	Select Default Secondary Font	✓	✓
ESC)s#B	Secondary Font Stroke Weight	✗	✗
ESC)s#H	Secondary Font Pitch	✗	✗
ESC)s#P	Secondary Font Spacing	✗	✗
ESC)s#S	Secondary Font Style	✗	✗
ESC)s#T	Secondary Font Typeface Selection	✗	✗
ESC)s#V	Secondary Font Height (Point Size)	✗	✗
ESC)s#W[data]	Load Font Header	✓	✓
ESC*b#M	Set Raster Compression Mode	✓	✓
ESC*b#V[data]	Transfer Raster Data (by Plane)	✓	✓
ESC*b#W[data]	Transfer Raster Data (by Row / Block)	✓	✓
ESC*b#Y	Y Offset	✓	✓
ESC*c#A	Horizontal Rectangle Size (in PCL Units)	✓	✓
ESC*c#B	Vertical Rectangle Size (in PCL Units)	✓	✓
ESC*c#D	Set Font ID	✓	✓
ESC*c#E	Set Character Code	✓	✓
ESC*c#F	Font Control	✓	✓
ESC*c#G	Area Fill ID	✓	✓
ESC*c#H	Horizontal Rectangle Size (in Decipoints)	✓	✓
ESC*c#K	GL/2 Horizontal Plot Size (in Inches)	✓	✓
ESC*c#L	GL/2 Vertical Plot Size (in Inches)	✓	✓

✓ = Supported ✗ = Not supported		Printer model	
Command	Function	C540n, C543dn, C544n, C544dn,C544dw, C544dtn	X546dtn
ESC*c#P	Fill Rectangular Area	✓	✓
ESC*c#Q	Pattern Control	✓	✓
ESC*c#R	Symbol Set ID Code	✓	✓
ESC*c#S	Symbol Set Control	✓	✓
ESC*cOT	Set Picture Frame Anchor Point	✓	✓
ESC*c#V	Vertical Rectangle Size (in Decipoints)	✓	✓
ESC*c#W[data]	User-Defined Pattern	✓	✓
ESC*c#X	Picture Frame Horizontal Size (in Decipoints)	✓	✓
ESC*c#Y	Picture Frame Vertical Size (in Decipoints)	✓	✓
ESC*l#O	Logical Operation	✓	✓
ESC*l#R	Pixel Placement	✓	✓
ESC*l#W[data]	Color Lookup Tables	✗	✗
ESC*m#W[data]	Download Dither Matrix	✓	✓
ESC{o#M(b)	Print Quality	✗	✗
ESC{o#Q	Mechanical Print Quality	✗	✗
ESC{o#W[data]	Driver Configuration Command	✓	✓
ESC*p#P	Push / Pop Palette	✓	✓
ESC*p#R	Set Pattern Reference Point	✓	✓
ESC*p#X	Horizontal Cursor Position (in PCL Units)	✓	✓
ESC*p#Y	Vertical Cursor Position (in PCL Units)	✓	✓
ESC*r#A	Start Raster Graphics	✓	✓
ESC*r#F	Raster Graphics Presentation Mode	✓	✓
ESC*r#S	Raster Width (Source)	✓	✓
ESC*r#T	Raster Height (Source)	✓	✓

✓ = Supported ✗ = Not supported		Printer model	
Command	Function	C540n, C543dn, C544n, C544dn,C544dw, C544dtn	X546dtn
ESC*r#U	Simple Color	✓	✓
ESC*rB	End Raster Graphics (Version B)	✓	✓
ESC*rC	End Raster Graphics (Version C)	✓	✓
ESC*s#I	Inquire Status Readback Entity	✓	✓
ESC*s#M	Free Space	✓	✓
ESC*s#T	Set Status Readback Location Type	✓	✓
ESC*s#U	Set Status Readback Location Unit	✓	✓
ESC*s#X	Echo	✓	✓
ESC*t#H	Raster Width Destination	✓	✓
ESC*t#I	Gamma Correction	✓	✓
ESC*t#J	Render Algorithm	✗	✗
ESC*t#K	Scale Algorithm	✗	✗
ESC*t#R	Raster Resolution	✓	✓
ESC*t#V	Raster Height Destination	✓	✓
ESC*g#W	Set Raster Configuration	✗	✗
ESC*v#A	Color Component One	✓	✓
ESC*v#B	Color Component Two	✓	✓
ESC*v#C	Color Component Three	✓	✓
ESC*v#I	Assign Color Index	✓	✓
ESC*v#N	Source Transparency Mode	✓	✓
ESC*v#O	Pattern Transparency Mode	✓	✓
ESC*v#\$	Foreground Color	✓	✓
ESC*v#T	Select Current Pattern	✓	✓
ESC*v#W[data]	Configure Image Data	✓	✓
ESC*i#W[data]	Viewing Illuminant	✗	✗
ESC9	Clear Horizontal Margins	✓	✓

✓ = Supported ✗ = Not supported		Printer model	
Command	Function	C540n, C543dn, C544n, C544dn,C544dw, C544dtn	X546dtn
ESC_=	Half Line-Feed	✓	✓
ESC%#A	Enter PCL Emulation	✓	✓
ESC%#B	Enter GL/2 Language  Note: The values of -1, 2, and 3 are not supported by any of the printers included in this document.	✓	✓
ESC%-[]12345X	Universal Exit Language (UEL) / Start of PJL	✓	✓

## GL/2 commands

✓ = Supported ✗ = Not supported		Printer model	
Command	Function	C540n, C543dn, C544n, C544dn,C544dw, C544dtn	X546dtn
AA	Arc Absolute	✓	✓
AC	Anchor Corner	✓	✓
AD	Define Alternate Font	✓	✓
AR	Arc Relative	✓	✓
AT	Arc Absolute Three Point	✓	✓
BR	Bezier Relative	✓	✓
BZ	Bezier Absolute	✓	✓
CF	Character Fill	✓	✓
CI	Circle	✓	✓
CO	Comment	✓	✓
CP	Character Plot	✓	✓
CR	Set Color Range	✓	✓
DF	Default	✓	✓
DI	Absolute Direction	✓	✓

✓ = Supported ✗ = Not supported		Printer model	
Command	Function	C540n, C543dn, C544n, C544dn,C544dw, C544dtn	X546dtn
DR	Relative Direction	✓	✓
DT	Define Label Terminator	✓	✓
DV	Define Variable Text Path	✓	✓
EA	Edge Rectangle Absolute	✓	✓
EP	Edge Polygon	✓	✓
ER	Edge Rectangle Relative	✓	✓
ES	Extra Space	✓	✓
EW	Edge Wedge	✓	✓
FI	Primary Font	✓	✓
FN	Secondary Font	✓	✓
FP	Fill Polygon, Odd/Even	✓	✓
FP	Fill Polygon, Non-Zero Winding	✓	✓
FT	Fill Type	✓	✓
FT	Fill Type - 22	✓	✓
FT	Fill Type - 9	✓	✓
IN	Initialize	✓	✓
IP	Input P1 and P2	✓	✓
IR	Input Relative P1 and P2	✓	✓
IW	Input Window	✓	✓
LA	Line Attributes	✓	✓
LB	Label, Default Terminator = '03'x	✓	✓
LO	Label Origin	✓	✓
LO	Uses PCL Label Origin	✓	✓
LT	Line Type	✓	✓
MC	Logical Operation	✓	✓
NP	Number of Pens	✓	✓

✓ = Supported ✗ = Not supported		Printer model	
Command	Function	C540n, C543dn, C544n, C544dn,C544dw, C544dtn	X546dtn
PA	Plot Absolute	✓	✓
PC	Set Pen Color	✓	✓
PD	Pen Down	✓	✓
PE	Polyline Encoded	✓	✓
PM	Polygon Mode	✓	✓
PP	Pixel Placement	✓	✓
PR	Plot Relative	✓	✓
PU	Pen Up	✓	✓
PW	Pen Width	✓	✓
RA	Fill Rectangle Absolute	✓	✓
RF	Define Raster Fill	✓	✓
RO	Rotate Coordinate System	✓	✓
RR	Fill Rectangle Relative	✓	✓
RT	Arc Relative Three Point	✓	✓
SA	Select Alternate Font	✓	✓
SB	Scalable/Bitmapped Fonts	✓	✓
SC	Scale	✓	✓
SD	Define Standard Font	✓	✓
SI	Absolute Character Size	✓	✓
SL	Character Slant	✓	✓
SM	Symbol Mode	✓	✓
SP	Select Pen	✓	✓
SR	Relative Character Size	✓	✓
SS	Select Standard Font	✓	✓
SV	Screened Vectors	✓	✓
SV	Screened Vectors - 9, level	✓	✓

✓ = Supported ✗ = Not supported		Printer model	
Command	Function	C540n, C543dn, C544n, C544dn,C544dw, C544dtn	X546dtn
TD	Transparent Data	✓	✓
TM	Threshold Matrix	✓	✓
TR	Transparency Mode	✓	✓
UL	User Defined Line	✓	✓
WG	Wedge Fill	✓	✓
WU	Pen Width Units	✓	✓

## Appendix B: PJL support

### Common variables for both printer languages

<b>Variable name</b>	<b>Printer model</b>	
✓ = Supported X = Not supported		
	C540n, C543n, C544n/dn/dw/dtn	X546dtn MFP
AUTOCONT	✓	✓
AUTOSELECT	X	X
BINDING	✓	✓
BITSPERPIXEL	X	X
CLEARABLEWARNINGS	✓	✓
CONTEXTSWITCH	X	X
COPIES	✓	✓
CPLOCK	✓	✓
DENSITY	✓	✓
DISKLOCK	X	X
DUPLEX	✓	✓
ECONOMODE	X	X
FORMATERNUMBER	✓	✓
FORMLINES	✓	✓
HELDJOBTIMEOUT	X	X
HOLD	X	X
HOLDKEY	X	X
HOLDTYPE	X	X
IMAGEADAPT	X	X
INTRAY1	X	X
INTRAY2	✓	✓
INTRAY3	✓	✓
INTRAY4	✓	✓
INTRAY5	✓	✓

<b>✓ = Supported</b> <b>X = Not supported</b>	<b>Printer model</b>	
<b>Variable name</b>	<b>C540n, C543n, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
INTRAY1SIZE	✓	✓
INTRAY2SIZE	✓	✓
INTRAY3SIZE	✓	✓
INTRAY4SIZE	✓	✓
INTRAY5SIZE	✓	✓
IOBUFFER	X	X
IOSIZE	X	X
JOBNAME	✓	X
LANG	✓	✓
LOWTONER	✓	✓
MANUALFEED	✓	✓
MEDIASOURCE	X	X
MEDIATYPE	✓	✓
MPTRAY	✓	✓
ORIENTATION	✓	✓
OUTBIN	✓	✓
PAGEPROTECT	✓	✓
PAPER	✓	✓
PARALLEL	X	X
PASSWORD	✓	✓
PERSONALITY	✓	✓
POWERSAVE	✓	✓
POWERSAVETIME	✓	✓
PRINTQUALITY	X	X
QTY	✓	✓
RENDERMODE	X	X
REPRINT	✓	✓

✓ = Supported ✗ = Not supported		Printer model	
Variable name		C540n, C543n, C544n/dn/dw/dtn	X546dtn MFP
RESOLUTION	✓	✓	✓
RESOURCESAVE	✓	✓	✓
RESOURCESAVESIZE	✗		✗
RET	✗		✗
STRINGCODESET	✓	✓	✓
TIMEOUT	✓	✓	✓
USERNAME	✗		✗
WIDEA4	✓	✓	✓

## Lexmark-unique PJL variables for both printer languages

✓ = Supported ✗ = Not supported		Printer model	
Variable name		C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
LACTIVEBINRESET	✗		✗
LADVANCEDSTATUS	✗		✗
LALARMCONTROL	✗		✓
LAUTOCRLF	✓	✓	✓
LAUTOLFCR	✓	✓	✓
LBAYERSCREENLIMIT	✓	✓	✓
LBLANKPAGES	✓	✓	✓
LBONDLOADING	✓	✓	✓
LBONDOUTBIN	✗		✗
LBONDTEXTURE	✓	✓	✓
LBONDWEIGHT	✓	✓	✓
LCANCEL	✓	✓	✓
LCARDSTOCKLOADING	✗		✗
LCARDSTOCKOUTBIN	✗		✗

<b>✓ = Supported</b> <b>X = Not supported</b>	<b>Printer model</b>	
<b>Variable name</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
LCARDSTOCKTEXTURE	✓	✓
LCARDSTOCKWEIGHT	✓	✓
LCOLLATION	✓	✓
LCOLORCORRECTION	X	X
LCOLOREDLOADING	✓	✓
LCOLOREDOUTBIN	X	X
LCOLOREDTEXTURE	✓	✓
LCOLOREDWEIGHT	✓	✓
LCUSTOMPAPERUNITS	✓	✓
LCUSTOMPAPERWIDTH	✓	✓
LCUSTOMPAPERHEIGHT	✓	✓
LCUSTOMPAPERFEED	✓	✓
LCUSTOMTYPE1LOADING	✓	✓
LCUSTOMTYPE1MEDIA	✓	✓
LCUSTOMTYPE1NAME	✓	✓
LCUSTOMTYPE1OUTBIN	X	X
LCUSTOMTYPE1TEXTURE	✓	✓
LCUSTOMTYPE1WEIGHT	✓	✓
LCUSTOMTYPE2LOADING	✓	✓
LCUSTOMTYPE2MEDIA	✓	✓
LCUSTOMTYPE2NAME	✓	✓
LCUSTOMTYPE2OUTBIN	X	X
LCUSTOMTYPE2TEXTURE	✓	✓
LCUSTOMTYPE2WEIGHT	✓	✓
LCUSTOMTYPE3LOADING	✓	✓
LCUSTOMTYPE3MEDIA	✓	✓
LCUSTOMTYPE3NAME	✓	✓

<b>✓ = Supported</b> <b>X = Not supported</b>	<b>Printer model</b>	
<b>Variable name</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
LCUSTOMTYPE3OUTBIN	X	X
LCUSTOMTYPE3TEXTURE	✓	✓
LCUSTOMTYPE3WEIGHT	✓	✓
LCUSTOMTYPE4LOADING	✓	✓
LCUSTOMTYPE4MEDIA	✓	✓
LCUSTOMTYPE4NAME	✓	✓
LCUSTOMTYPE4OUTBIN	X	X
LCUSTOMTYPE4TEXTURE	✓	✓
LCUSTOMTYPE4WEIGHT	✓	✓
LCUSTOMTYPE5LOADING	✓	✓
LCUSTOMTYPE5MEDIA	✓	✓
LCUSTOMTYPE5NAME	✓	✓
LCUSTOMTYPE5OUTBIN	X	X
LCUSTOMTYPE5TEXTURE	✓	✓
LCUSTOMTYPE5WEIGHT	✓	✓
LCUSTOMTYPE6LOADING	✓	✓
LCUSTOMTYPE6MEDIA	✓	✓
LCUSTOMTYPE6NAME	✓	✓
LCUSTOMTYPE6OUTBIN	X	X
LCUSTOMTYPE6TEXTURE	✓	✓
LCUSTOMTYPE6WEIGHT	✓	✓
LDOWNLOADTARGET	✓	✓
LDUPLICATEHELDJOBS	X	X
LECOMODE	✓	✓
LENVELOPEOUTBIN	X	X
LENVELOPETEXTURE	✓	✓
LENVELOPEWEIGHT	✓	✓

<b>✓ = Supported</b> <b>X = Not supported</b>	<b>Printer model</b>	
<b>Variable name</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
LESCCHAR	✓	✓
LFAJXJOBWAITFORTONER	X	X
LFAJXRDIAL	X	✓
LFAJXRDIALFREQUENCY	X	✓
LFAJXRESOLUTION	X	✓
LFAJXTRANSMISSIONLOG	X	✓
LGLOSSYLOADING	✓	✓
LGLOSSYOUTBIN	X	X
LGLOSSYTEXTURE	✓	✓
LGLOSSYWEIGHT	✓	✓
LHEAVYGLOSSYLOADING	X	X
LHEAVYGLOSSYOUTBIN	X	X
LHEAVYGLOSSYTEXTURE	X	X
LHEAVYGLOSSYWEIGHT	X	X
LHEAVYPAPERLOADING	✓	✓
LHEAVYPAPEROUTBIN	X	X
LHEAVYPAPERTEXTURE	✓	✓
LHEAVYPAPERWEIGHT	✓	✓
LHELDJOBPRTORDER	X	X
LHONORINIT	X	X
LIMAGEBRIGHTNESS	X	X
LIMAGECONTRAST	X	X
LIMAGEENHANCE	X	X
LIMAGEENHANCETYPE	X	X
LIMAGEORIENTATION	✓	✓
LINFEEDER	X	X
LINMPFEEDERSIZE	✓	✓
LJAMRECOVERY	✓	✓
LJOPARKPERSIST	X	X

<b>✓ = Supported</b> <b>X = Not supported</b>	<b>Printer model</b>	
<b>Variable name</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
LJOBWAITFORSUPPLIES	X	X
LLABELSLOADING	X	X
LLABELSOUTBIN	X	X
LLABELSTEXTURE	✓	✓
LLABELSWEIGHT	✓	✓
LLASTTRAYRENUMBER	✓	✓
LLETTERHEADLOADING	✓	✓
LLETTERHEADOUTBIN	X	X
LLETTERHEADTEXTURE	✓	✓
LLETTERHEADWEIGHT	✓	✓
LLIGHTPAPERLOADING	✓	✓
LLIGHTPAPEROUTBIN	X	X
LLIGHTPAPERTEXTURE	✓	✓
LLIGHTPAPERWEIGHT	✓	✓
LLINEDTAIL	✓	✓
LMANUALENVELOPESIZE	✓	✓
LMANUALENVELOPETYPE	✓	✓
LMANUALPAPERSIZE	✓	✓
LMANUALPAPERTYPE	✓	✓
LMPFEEDERPAPERTYPE	✓	✓
LMPFEEDERRENUMBER	✓	✓
LMULTIPAGEBORDER	✓	✓
LMULTIPAGEORDER	✓	✓
LMULTIPAGEPRINT	✓	✓
LMULTIPAGEVIEW	✓	✓
LNPAP	✓	✓
LOVERFLOWOUTBIN	X	X

<b>✓ = Supported</b> <b>X = Not supported</b>	<b>Printer model</b>	
<b>Variable name</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
LOVERFLOUTIMER	X	X
LOUTBINCONFIG	X	X
LPAGECOUNT	✓	✓
LPAGEMODE	✓	✓
LPAPERSOURCE	✓	✓
LPLAINOUTBIN	X	X
LPLAINTEXTURE	✓	✓
LPLAINWEIGHT	✓	✓
LPOWERSAVER	✓	✓
LPPDS	✓	✓
LPPDSFORMLINES	✓	✓
LPPDSLINESPERINCH	✓	✓
LPREPRINTEDLOADING	✓	✓
LPREPRINTEDOUTBIN	X	X
LPREPRINTEDTEXTURE	✓	✓
LPREPRINTEDWEIGHT	✓	✓
LPRINTBUFFER	✓	✓
LPRINTSCREENS	✓	✓
LQUIETMODE	✓	✓
LRECYCLEDLOADING	✓	✓
LRECYCLEDMEDIA	✓	✓
LRECYCLEDOUTBIN	X	X
LRECYCLEDTEXTURE	✓	✓
LRECYCLEDWEIGHT	✓	✓
LREPEATPRINTLIMIT	X	X
LRESET	X	X
LRESOURCESAVE	✓	✓

<b>✓ = Supported</b> <b>X = Not supported</b>	<b>Printer model</b>	
<b>Variable name</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
LROUGHENVELOPELOADING	X	X
LROUGHENVELOPEOUTBIN	X	X
LROUGHENVELOPETEXTURE	X	X
LROUGHENVELOPEWEIGHT	X	X
LROUGHPAPERLOADING	X	X
LROUGHPAPEROUTBIN	X	X
LROUGHPAPERTEXTURE	✓	✓
LROUGHPAPERWEIGHT	✓	✓
LSEPARATORSHEETS	✓	✓
LSEPARATORSOURCE	✓	✓
LSMALLFONTENHANCER	X	X
LSSGALVO	X	X
LSTANDARDOUTBINNAME	✓	✓
LSTROKEWIDTH	✓	✓
LSUBSTITUTESIZE	X	X
LTOPBINROTATE	X	X
LTRANSPARENCYOUTBIN	X	X
LTRANSPARENCYTEXTURE	✓	✓
LTRANSPARENCYWEIGHT	✓	✓
LTRAY1AUTOSIZE	X	X
LTRAY2AUTOSIZE	X	X
LTRAY3AUTOSIZE	X	X
LTRAY4AUTOSIZE	X	X
LTRAY5AUTOSIZE	X	X
LTRAY1PAPERTYPE	✓	✓
LTRAY2PAPERTYPE	✓	✓
LTRAY3PAPERTYPE	✓	✓
LTRAY4PAPERTYPE	✓	✓
LTRAY5PAPERTYPE	✓	✓

<b>✓ = Supported</b> <b>X = Not supported</b>	<b>Printer model</b>	
<b>Variable name</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
LTRAY1RENUMBER	✓	✓
LTYPE1FONTS	✓	✓
LUSDEFAULTS	✓	✓
LVINYLLABELSLOADING	X	X
LVINYLABELSOUTBIN	X	X
LVINYLLABELSTEXTURE	X	X
LVINYLABELSWEIGHT	X	X
LWRITECOVERAGE	✓	✓

## Common variables for PCL emulation

<b>✓ = Supported</b> <b>X = Not supported</b>	<b>Printer model</b>	
<b>Variable name</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>8X546dtn MFP</b>
FONTPRINTNUMBER	✓	✓
FONTPRINTSOURCE	✓	✓
PITCH	✓	✓
PTSIZE	✓	✓
SYMSET	✓	✓

## Printer-unique variables for PCL emulation

<b>✓ = Supported</b> <b>X = Not supported</b>	<b>Printer model</b>	
<b>Variable name</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
LA4WIDTH	✓	✓
LASSIGNFEEDER	X	X
LASSIGNMANUALENVELOPE	✓	✓

✓ = Supported ✗ = Not supported		Printer model	
Variable name		C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
LASSIGNMANUALPAPER	✓	✓	✓
LASSIGNMPFEEDER	✓	✓	✓
LASSIGNTRAY1	✓	✓	✓
LASSIGNTRAY2	✓	✓	✓
LASSIGNTRAY3	✓	✓	✓
LASSIGNTRAY4	✓	✓	✓
LASSIGNTRAY5	✓	✓	✓
LBITMAPROUNDING	✓	✓	✓
LCOLOREXTENSIONS	✓	✓	✓
LFONTCOMPATIBILITY	✓	✓	✓
LFONTPRIORITY	✓	✓	✓

## Common variables for PostScript emulation

✓ = Supported ✗ = Not supported		Printer model	
Variable name		C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
JAMRECOVERY	✓	✓	✓
PRTPSERRS	✓	✓	✓
ADOBEMBT	✗	✗	✗

## Printer-unique variables for PostScript emulation

✓ = Supported ✗ = Not supported		Printer model	
Variable name		C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
LPSFONTPRIORITY	✓	✓	✓

## Printer-unique LRESOURCE variables

<b>✓ = Supported</b> <b>X = Not supported</b>	<b>Printer model</b>	
<b>Variable name</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
LDESCRIPTION	✓	✓
LRWLOCK	✓	✓
LWLOCK	✓	✓

## Status Readback commands

<b>✓ = Supported</b> <b>X = Not supported</b>	<b>Printer model</b>	
<b>Variable name</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
Dinqire	✓	✓
Echo	✓	✓
Info	✓	✓
Inquire	✓	✓
Ustatus	✓	✓
Ustatusoff	✓	✓

## USTATUS unsolicited status variables

<b>✓ = Supported</b> <b>X = Not supported</b>	<b>Printer model</b>	
<b>Variable name</b>	<b>C540n, 543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
DEVICE	✓	✓
JOB	✓	✓
PAGE	✓	✓
TIMED	✓	✓

## PJL messages for auto-continuable conditions

✓ = Supported ✗ = Not supported			Printer model	
Message	Status code	Return string	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
Intervention Required - PPDS Font Error	30014	<b>50 PPDS Font Error</b>	✓	✓
Intervention Required - Insufficient Collation Area	30016	<b>37 Insufficient Collation Area</b>	✗	✗
Intervention Required - Insufficient Defragment Memory	30016	<b>37 Insufficient Defrag Memory</b>	✗	✗
Intervention Required - Insufficient Memory	30016	<b>37 Insufficient Memory</b>	✗	✗
Intervention Required - Insufficient Memory	30016	<b>37 Insufficient memory for Flash Memory Defragment operation</b>	✗	✗
Intervention Required - Insufficient Defragment Memory	30016	<b>37 Insufficient memory, some Held Jobs were deleted</b>	✗	✗
Intervention Required - Insufficient Defragment Memory	30016	<b>37 Insufficient memory, some Held Jobs will not be restored</b>	✗	✗
Intervention Required - Insufficient Defrag Memory	30016	<b>37 Insufficient memory for Flash Memory Defragment operation</b>	✓	✓
Intervention Required - Insufficient Collation Area	30016	<b>37 Insufficient memory to collate job</b>	✓	✓
Intervention Required - Memory Full	30016	<b>38 Memory Full</b>	✓	✓
Intervention Required - Configuration Change	30016	<b>57 Configuration Change</b>	✗	✗

✓ = Supported ✗ = Not supported			Printer model	
Message	Status code	Return string	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
Intervention Required - Configuration Change	30016	57 Configuration change, some held jobs were not restored	✗	✗
Intervention Required - Held Jobs May Not Be Restored	30016	Held Jobs May Not Be Restored	✗	✗
Intervention Required - Held Jobs May Not Be Restored	30016	Some held jobs were not restored	✗	✗
Intervention Required - Complex Page	30017	39 Complex Page	✗	✗
Intervention Required - Complex Page	30017	39 Complex Page, some data may not have printed	✓	✓
Intervention Required - Parallel Error	30018	54 Parallel Error	✗	✗
Intervention Required - Serial Option Error	30018	54 Serial option <slot #> error	✗	✗
Intervention Required - Standard Serial Error	30018	54 Standard Serial Error	✗	✗
Intervention Required - Network Software Error	30018	54 Standard network software error	✓	✓
Intervention Required - Standard Serial Fax Connection Lost	30018	54 Std Ser Fax Connection Lost	✗	✗
Intervention Required - Parallel Port Disabled	30018	56 Parallel Port Disabled	✗	✗
Intervention Required - Parallel Port Error	30018	56 Parallel Port [x] Disabled	✗	✗
Intervention Required - Serial Option Disabled	30018	56 Serial <slot #> Port Disabled	✗	✗

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
Intervention Required - Standard Serial Disabled	30018	<b>56 Standard Serial Disabled</b>	X	X
Intervention Required - Standard USB Disabled	30018	<b>56 Standard USB port disabled</b>	✓	✓
Intervention Required - Std Parallel Port Disabled	30018	<b>56 Std Parallel Port Disabled</b>	X	X
Intervention Required - Resource Save Off Deficient Memory	30019	<b>35 Res Save Off Deficient Memory</b>	X	X
Intervention Required - Insufficient Fax Buffer	30026	<b>55 Insufficient Fax Buffer</b>	X	X
Intervention Required - Std Par ENA Connection Lost	30027	<b>54 Std Par ENA Connection Lost</b>	X	X
Intervention Required - Standard Parallel Port Disabled	30027	<b>56 Standard Parallel Port Disabled</b>	X	X
Intervention Required - Std Parallel Port Disabled	30027	<b>56 Std Parallel Port Disabled</b>	X	X
Intervention Required - Resolution Reduced	30029	<b>36 Resolution Reduced</b>	X	X
Intervention Required - Print Jobs on Disk Request	30031	<b>Print Jobs on Disk? or Print Jobs on Disk. Go/Stop?</b>	X	X
Intervention Required - Restore Held Jobs. Go/Stop?	30031	<b>Restore Held Jobs. Go/Stop?</b>	X	X
Intervention Required - Short Paper	30034	<b>34 Short Paper</b>	✓	✓
Intervention Required - Flash Full	30035	<b>52 Flash Full</b>	X	X
Intervention Required - Disk Full	30035	<b>62 Disk Full</b>	X	X
Intervention Required - Defective Flash	30036	<b>51 Defective Flash</b>	X	X

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
Intervention Required - Unformatted Flash	30036	<b>53 Unformatted Flash</b>	X	X
Intervention Required - Defective Disk	30036	<b>61 Defective Disk</b>	X	X
Intervention Required - Unformatted Disk	30036	<b>63 Unformatted Disk</b>	X	X
Intervention Required - Unformatted Flash	32052	<b>53 Unformatted flash detected</b>	✓	✓
Intervention Required - Defective Flash	32056	<b>53 Defective flash detected</b>	✓	✓
Intervention Required - Scheduled Maintenance	30075	<b>80 Scheduled Maintenance</b>	X	X
Intervention Required - Scheduled Maintenance	30075	<b>80 Scheduled maintenance ADF kit</b>	X	X
Intervention Required - Res Save Off Deficient Memory	30076	<b>35 Insufficient memory to support Resource Save feature</b>	✓	✓
Intervention Required - Insufficient Memory	30076	<b>35 Insufficient memory to support Resource Save feature</b>	X	X
Intervention Required - Resource Save Off Deficient Memory	30076	<b>35 Res Save Off Deficient Memory</b>	✓	✓
Intervention Required - Insufficient Collation Area	30076	<b>37 Insufficient Collation Area</b>	X	X
Intervention Required - Service Required	30095	<b>36 Printer service required</b>	X	X
Intervention Required - Empty Box M	30107	<b>Empty Box M</b>	X	X
Intervention Required - Empty Hole Punch Box	30107	<b>Empty Hole Punch Box</b>	X	X

✓ = Supported ✗ = Not supported			Printer model	
Message	Status code	Return string	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
Intervention Required - Insert Box M	30107	<b>Insert Box M</b>	✗	✗
Intervention Required - Insert Staple Cartridge	30107	<b>Insert staple cartridge</b>	✗	✗
Intervention Required - Insert Stapler	30107	<b>Insert Stapler</b>	✗	✗
Intervention Required - Priming Failed	30107	<b>Priming Failed, Retry. Go/Stop?</b>	✗	✗
Intervention Required - Network <x> Software Error	30112	<b>54 Network &lt;x&gt; Software Error</b>	✓	✓
Intervention Required - Serial <x> Fax Connection Lost	30112	<b>54 Ser &lt;x&gt; Fax Connection Lost</b>	✗	✗
Intervention Required - Serial Option <x> Error	30112	<b>54 Serial Option &lt;x&gt; Error</b>	✗	✗
Intervention Required - Serial Port <x> Disabled	30112	<b>56 Serial Port &lt;x&gt; Disabled</b>	✗	✗
Intervention Required - USB Port Disabled	30112	<b>56 USB Port &lt;x&gt; Disabled</b>	✗	✗
Intervention Required - Parallel <x> ENA Connection Lost	30113	<b>54 Par &lt;x&gt; ENA Connection Lost</b>	✗	✗
Intervention Required - Parallel <x> Port Disabled	30113	<b>56 Parallel Port &lt;x&gt; Disabled</b>	✗	✗
Intervention Required - Disk Operation Failed Faxes on Disk	32001	<b>Operation Failed Faxes on Disk</b>	✗	✗
Intervention Required - Disk Operation Failed Jobs on Disk	32001	<b>Operation Failed Jobs on Disk</b>	✗	✗
Intervention Required - Flash Full	32002	<b>52 Flash Full</b>	✗	✗

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
Intervention Required - Flash Full	32002	<b>52 Not enough free space in flash memory for resources</b>	✓	✓
Intervention Required - Disk Full	32002	<b>62 Disk full</b>	X	X
Intervention required - Disk Corrupted	32015	<b>Disk corrupted</b>	X	X
Intervention required - Disk Corrupted. Reformat?	32015	<b>Disk Corrupted. Reformat?</b>	X	X
Intervention Required - Too Many Bins Attached	32030	<b>58 Too many bins attached</b>	X	X
Intervention Required - Too Many Flash Options Installed	32030	<b>58 Too Many Flash Options</b>	✓	✓
Intervention Required - Too Many Flash Options Installed	32030	<b>58 Too many flash options installed</b>	✓	✓
Intervention Required - Unformatted Flash	32052	<b>53 Unformatted Flash</b>	X	X
Intervention Required - Unformatted Flash Detected	32052	<b>53 Unformatted flash detected</b>	✓	✓
Intervention Required - Unformatted Disk	32052	<b>63 Unformatted disk</b>	X	X
Intervention Required - Unsupported Disk Format	32052	<b>64 Unsupported Disk Format</b>	X	X
Intervention Required - Defective Flash	32056	<b>51 Defective Flash</b>	X	X
Intervention Required - Defective Flash	32056	<b>51 Defective flash detected</b>	✓	✓
Intervention Required - Defective Disk	32056	<b>61 Defective Disk</b>	X	X
Intervention Required - Defective Disk	32056	<b>61 Remove defective disk</b>	X	X

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
Intervention Required - Scheduled Maintenance	35075	<b>80 Scheduled Maintenance</b>	X	X
Intervention Required - Scheduled Maintenance	35075	<b>81 Scheduled Maintenance</b>	X	X
Intervention Required - Belt Exhausted	40038	<b>80 Belt Exhausted</b>	X	X
Intervention Required - Belt Life Warning	40038	<b>80 Belt Life Warning</b>	X	X
Intervention Required - Fuser/Belt Exhausted	40038	<b>80 Fuser/Belt Exhausted</b>	X	X
Intervention Required - Fuser/Belt Life Warning	40038	<b>80 Fuser/Belt Life Warning</b>	X	X
Intervention Required - Fuser Exhausted	40038	<b>80 Fuser Exhausted</b>	X	X
Intervention Required - Fuser Life Warning	40038	<b>80 Fuser Life Warning</b>	X	X
Intervention Required - Fuser Maintenance	40038	<b>80 Fuser Maintenance</b>	X	X
Intervention Required - ITU Maintenance	40038	<b>83 ITU Maintenance</b>	X	X

## PJL messages for attendance conditions

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
Intervention Required - Too Many Bins Attached	32030	<b>58 Too many bins attached</b>	X	X
Intervention Required - Too Many Flash Options Installed	32030	<b>58 Too many flash options installed</b>	✓	✓

\* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported ✗ = Not supported			Printer model	
Message	Status code	Return string	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
Intervention Required - Remove Defective Disk	32056	61 Remove defective disk	✗	✗
Intervention Required - Defective Flash	32056	61 Defective flash detected	✓	✓
Intervention Required - Insert Hole Punch Box	40010	Insert Hole Punch Box	✗	✗
Intervention Required - Insert PC Cartridge	40010	Insert PC Cartridge	✗	✗
Intervention Required - 30 CMYK* Print Unit Missing	40010	30 CMYK* Print Unit Missing	✗	✗
Intervention Required - 30 Coating Roll Missing	40010	30 Coating Roll Missing	✗	✗
Intervention Required - Remove Originals from Scanner ADF	40019	Remove originals from the scanner automatic document feeder	✗	✗
Intervention Required - Remove Paper Standard Bin	40019	Remove paper from standard output bin	✓	✓
Intervention Required - Install MICR cartridge	40020	Install MICR cartridge	✗	✗
Intervention Required - Cartridge Life Expired	40021	Cartridge Life Expired CMYK*	✗	✗
Intervention Required - Cartridge Life Warning	40021	Cartridge Life Warning CMYK*	✗	✗
Intervention Required - Change Cartridge Invalid Refill	40021	Change Cartridge Invalid Refill	✗	✗
Intervention Required - Close Cover <c>	40021	Close Cover <c>	✗	✗
Intervention Required - Printer Cover Open	40021	Close Cover	✗	✗

\* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
Intervention Required - Close Toner Box Cover	40021	<b>Close Cover</b>	X	X
Intervention Required - Close Deflector G	40021	<b>Close Deflector G</b>	X	X
Intervention Required - Close Door	40021	<b>Close Door</b>	✓	✓
Intervention Required - Close Door <d>	40021	<b>Close Door &lt;d&gt;</b>	X	X
Intervention Required - Close Door Insert Cartridge	40021	<b>Close door or insert cartridge</b>	X	X
Intervention Required - Close Finisher Door	40021	<b>Close Finisher Door</b>	X	X
Intervention Required - Close Finisher Side Door	40021	<b>Close Finisher Side Door</b>	X	X
Intervention Required - Close Finisher Top Cover	40021	<b>Close Finisher Top Cover</b>	X	X
Intervention Required - Close Front Door	40021	<b>Close Front Door</b>	X	X
Intervention Required - Close Side Door	40021	<b>Close Side Door</b>	X	X
Intervention Required - Close Surface	40021	<b>Close surface H</b>	X	X
Intervention Required - Close Cover	40021	<b>Close top access cover</b>	X	X
Intervention Required - Close Cover and Door	40021	<b>Close top access cover and front door</b>	X	X
Intervention Required - Close Door	40021	<b>Close &lt;tray&gt; door</b>	X	X
Intervention Required - Close Tray <x> Top Cover	40021	<b>Close Tray &lt;x&gt; Top Cover</b>	X	X

\* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported ✗ = Not supported			Printer model	
Message	Status code	Return string	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
Intervention Required - Printer Upper Door Open	40021	<b>Cover Open, Close Top Covers, Close Door, or Insert Cartridge</b>	✗	✗
Intervention Required - Insert Print Cartridge	40021	<b>Insert Print Cartridge</b>	✗	✗
Intervention Required - Open Cover	40021	<b>Open Cover</b>	✗	✗
Intervention Required - Open Rear Door	40021	<b>Open Rear Door</b>	✗	✗
Intervention Required - Invalid Refill	40021	<b>30 Invalid Refill Change Cartridge</b>	✗	✗
Intervention Required - Defective Ink Cartridge	40021	<b>31 Defective Cartridge CMYK*</b>	✗	✗
Intervention Required - Defective Print Cartridge	40021	<b>31 Defective Print Cartridge</b>	✗	✗
Intervention Required - Missing Cartridge	40021	<b>31 Missing Cartridge CMYK*</b>	✗	✗
Intervention Required - Missing Printhead	40021	<b>31 Missing Printhead</b>	✗	✗
Intervention Required - Defective Print Cartridge	40021	<b>31 Replace defective cartridge</b>	✗	✗
Intervention Required - Invalid Refill	40021	<b>31.yy Invalid refill, change cartridge</b>	✗	✗
Intervention Required - Defective Print Cartridge	40021	<b>31.yy Replace defective cartridge</b>	✗	✗
Intervention Required - Defective Print Cartridge	40021	<b>31.yy Replace defective print cartridge</b>	✗	✗
Intervention Required - Unsupported Cartridge	40021	<b>32 Unsupported Cartridge</b>	✗	✗

\* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
Intervention Required - Unsupported CMYK* Cartridge	40021	32 Unsupported CMYK* Cartridge	X	X
Intervention Required - Unsupported Print Cartridge	40021	32 Unsupported Print Cartridge	X	X
Intervention Required - Unsupported Printhead	40021	32 Unsupported Printhead	X	X
Intervention Required - Unsupported Cartridge	40021	32.yy Cartridge part number unsupported by device	X	X
Intervention Required - Tray Size Sense Error	40021	40 Tray <x> Size Sense Error	X	X
Intervention Required - Open Bin Exit Tray	40021	41 Open Bin 1 Exit Tray	X	X
Intervention Required - Cartridge Region Mismatch	40021	42.xy Cartridge region mismatch	X	X
Intervention Required - Paper Jam	40022	2xx Paper Jam	X	X
Intervention Required - Remove Packaging Material	40025	Remove packaging material	✓	✓
Intervention Required - Waste Toner Missing	40025	82 Waste toner box missing	✓	✓
Intervention Required - Waste Toner Box Missing	40025	82.yy Waste toner box missing	X	X
Intervention Required - Check Tray Connection	40027	Check tray <source #> connection	X	X
Intervention Required - Install Tray <x> or Cancel Job	40027	Install Tray <x>	X	X

\* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported ✗ = Not supported			Printer model	
Message	Status code	Return string	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
Intervention Required - Install Tray <x> or Cancel Job	40027	Install Tray <x> or Cancel Job	✗	✗
Intervention Required - Install Envelope Feeder	40028	Install envelope feeder	✗	✗
Intervention Required - Install Env Feeder or Cancel Job	40028	Install Env Feed or Cancel Job	✗	✗
Intervention Required - Reattach Envelope Feeder	40028	Reattach Envelope Feeder	✗	✗
Intervention Required - Reattach MP Feeder	40028	Reattach MP Feeder	✗	✗
Intervention Required - Check Finisher Installation	40029	Check Finisher Installation	✗	✗
Intervention Required - Check Mailbox Installation	40029	Check Mailbox Installation	✗	✗
Intervention Required - Install Bin <x> or Cancel Job	40029	Install Bin <x> or Cancel Job	✗	✗
Intervention Required - Reattach Bin	40029	Reattach bin <x>	✗	✗
Intervention Required - Reattach Bins	40029	Reattach Bins <bin #x-bin #y>	✗	✗
Intervention Required - Reattach Output Bin	40029	Reattach Output Bin <bin #>	✗	✗
Intervention Required - Tray Config Error	40030	33 Tray <x> Config Error	✗	✗
Intervention Required - Input Config Error	40030	58 Input config error	✗	✗
Intervention Required - Too Many Bins Attached	40030	58 Too Many Bins Attached	✗	✗

\* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported ✗ = Not supported			Printer model	
Message	Status code	Return string	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
Intervention Required - Too Many Disks Installed	40030	58 Too many disks installed	✗	✗
Intervention Required - Too Many Trays Attached	40030	58 Too many trays attached	✓	✓
Intervention Required - Too Many Disks Installed	40036	58 Too Many Disks Installed	✗	✗
Intervention Required - PerfectFinish Missing	40037	31 PerfectFinish Missing	✗	✗
Intervention Required - PerfectFinish Empty	40037	87 PerfectFinish Empty	✗	✗
Intervention Required - Replace Oil Coating Roll	40038	Replace Oil Coating Roll	✗	✗
Intervention Required - Replace PC Kit	40038	Replace PC Kit	✗	✗
Intervention Required - Replace PC Kit To Continue	40038	Replace PC Kit To Continue	✗	✗
Intervention Required - Replace Toner Cartridge	40038	Replace Toner Cartridge	✗	✗
Intervention Required - Replace Toner Cartridge To Continue	40038	Replace Toner To Continue	✗	✗
Intervention Required - 84 All Photo Devs Exhausted	40038	84 All Photo Devs Exhausted	✗	✗
Intervention Required - 84 Black Photo Dev Exhausted	40038	84 Black Photo Dev Exhausted	✗	✗
Intervention Required - 84 Black Photo Dev Life Warning	40038	84 Black Photo Dev Life Warning	✗	✗
Intervention Required - 84 Color Photo Dev Life Warning	40038	84 Color Photo Dev Life Warning	✗	✗

\* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
Intervention Required - Cartridge Low	40038	88 Cartridge Low	X	X
Intervention Required - [Color] Cartridge Low	40038	88 [Color] cartridge is low	✓	✓
Intervention Required - Toner Low	40038	88 Cartridge low	X	X
Intervention Required - Cartridge Low	40038	88 Cartridge Low <CMYK>	X	X
Intervention Required - Toner Low	40038	88 Toner is low	X	X
Intervention Required - Toner Low	40038	88 Toner Low	X	X
Intervention Required - Toner Low	40038	88 Yellow Toner Low	X	X
		88 Magenta Toner Low		
		88 Cyan Toner Low		
	40038	88 Black Toner Low		
		88 Color Print Cartridge Low	X	X
		88 Black Print Cartridge Low		
	40038	88 Photo Print Cartridge Low		
		88 Yellow Toner Empty	X	X
		88 Magenta Toner Empty		
	40038	88 Cyan Toner Empty		
		88 Black Toner Empty		
		88.yy Cartridge nearly low	X	X

\* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported ✗ = Not supported			Printer model	
Message	Status code	Return string	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
Intervention Required - Cartridge Empty	40039	89 Cartridge Empty <CMYK>	✗	✗
Intervention Required - Load Staples	40040	Load Staples	✗	✗
Intervention Required - Priming Failed. Retry?	40041	Priming Failed. Retry?	✗	✗
Intervention Required - OPMSC	40048	OPMSG message	✗	✗
Intervention Required - PJL OP Message	40048	OPMSG message	✓	✓
Intervention Required - STMSG	40049	STMSG message	✗	✗
Intervention Required - PJL ST Message	40049	STMSG message	✓	✓
Intervention Required - Replace Fuser	40050	Replace Fuser	✗	✗
Intervention Required - Replace Transfer Kit	40050	Replace Transfer Kit	✗	✗
Intervention Required - Incompatible Bin <x>	40087	59 Incompatible Bin <x>	✗	✗
Intervention Required - Incompatible Bin <x>	40087	59 Incompatible output bin <x>	✗	✗
Intervention Required - Incompatible Duplex	40088	59 Incompatible Duplex	✗	✗
Intervention Required - Incompatible Duplex	40088	59 Incompatible duplex	✗	✗
Intervention Required - Incompatible Tray <x>	40089	59 Incompatible Tray <x>	✓	✓
Intervention Required - Incompatible Tray <x>	40089	59 Incompatible tray <x>	✓	✓
Intervention Required - Incompatible Envelope Feeder	40090	59 Incompatible Envelope Feeder	✗	✗

\* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
Intervention Required - Incompatible Envelope Feeder	40090	59 Incompatible envelope feeder	X	X
Intervention Required - Check Duplex Connection	40095	Check Duplex Connection	X	X
Intervention Required - Check Duplex Connection	40095	Check duplex connection	X	X
Intervention Required - Install Duplex or Cancel Job	40095	Install Duplex or Cancel Job	X	X
Intervention Required - Install Duplex or Cancel Job	40095	Install duplex	X	X
Intervention Required - Duplex Cover Open	40096	Close Duplex Door	X	X
Intervention Required - Insert Duplex Option	40096	Insert Duplex Option	X	X
Intervention Required - Load Staples	40101	Load Staples	X	X
Intervention Required - Insert Hole Punch Box	40107	Insert the hole punch box	X	X
Intervention Required - Replace Color PC Units	40129	84 Replace color PC Units	X	X
Intervention Required - Replace Photoconductor	40129	84.yy Replace <color> photoconductor	X	X
Intervention Required - Replace Waste Toner Box	40141	82.yy Replace waste toner box	X	X
Intervention Required - Replace Waste Toner	40141	82 Replace waste toner box	✓	✓
Intervention Required - Waste Toner Box Nearly Full	40141	82.yy Waste toner box nearly full	X	X

\* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported ✗ = Not supported			Printer model	
Message	Status code	Return string	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
Intervention Required - Waste Toner Nearly Full	40141	82 Waste toner box nearly full	✓	✓
Intervention Required - Transfer Module Missing	40143	83.yy Transfer module missing	✗	✗
Intervention Required - Cartridge Low	40200	88.yy black cartridge low	✗	✗
Intervention Required - Cartridge Nearly Low	40200	88.1x black cartridge nearly low	✗	✗
Intervention Required - Replace Cartridge	40200	88.2x Replace black cartridge	✗	✗
Intervention Required - Cartridge Low	40201	88.yy cyan cartridge low	✗	✗
Intervention Required - Cartridge Nearly Low	40201	88.1x cyan cartridge nearly low	✗	✗
Intervention Required - Replace Cartridge	40201	88.2x Replace cyan cartridge	✗	✗
Intervention Required - Cartridge Low	40202	88.yy magenta cartridge low	✗	✗
Intervention Required - Cartridge Nearly Low	40202	88.1x magenta cartridge nearly low	✗	✗
Intervention Required - Replace Cartridge	40202	88.2x Replace magenta cartridge	✗	✗
Intervention Required - Cartridge Low	40203	88.yy yellow cartridge low	✗	✗
Intervention Required - Cartridge Nearly Low	40203	88.1x yellow cartridge nearly low	✗	✗
Intervention Required - Replace Cartridge	40203	88.2x Replace yellow cartridge	✗	✗
Black PC Unit Life Warning	40204	84 Black pc unit life warning	✗	✗

\* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported ✗ = Not supported			Printer model	
Message	Status code	Return string	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
Intervention Required - Unsupported PC Unit	40204	84 unsupported [color] pc unit	✗	✗
Intervention Required - Color PC Units Life Warning	40204	84.yy Color PC Unit Life warning	✗	✗
Intervention Required - PC Kit Life Warning	40204	84 PC kit life warning	✗	✗
Intervention Required - Photoconductor Low	40204	84.yy <color> photoconductor low	✗	✗
Intervention Required - Photoconductor Low	40204	84 Photoconductor low	✗	✗
Intervention Required - Photoconductor Nearly Low	40204	84.yy [color] photoconductor nearly low	✗	✗
Intervention Required - Transfer Module Life Warning	40215	83.yy Transfer module life warning	✗	✗
Intervention Required - Transfer Module Near Life Warning	40215	83.yy Transfer module near life warning	✗	✗
Intervention Required - Fuser Life Warning	40216	87 Fuser Life Warning	✗	✗
Intervention Required - Fuser Life Warning	40216	80.yy Fuser life warning	✗	✗
Intervention Required - Fuser Near Life Warning	40216	80.yy Fuser near life warning	✗	✗
Intervention Required - Replace Toner	40300	88 Replace black toner	✗	✗
Intervention Required - Replace Toner	40301	88 Replace cyan toner	✗	✗
Intervention Required - Replace Toner	40302	88 Replace magenta toner	✗	✗

\* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported ✗ = Not supported			Printer model	
Message	Status code	Return string	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
Intervention Required - Replace Toner	40303	88 Replace yellow toner	✗	✗
Intervention Required - Replace PC Kit	40304	84 Replace PC Kit	✗	✗
Intervention Required - Replace Photoconductor	40304	84 Replace photoconductor	✗	✗
Intervention Required - 84 Replace Black PC Unit	40305	84 Replace black PC Unit	✗	✗
Intervention Required - Cartridge Part Number Unsupported	40309	32.yy black cartridge part number unsupported by device	✗	✗
Intervention Required - Replace unsupported cartridge	40309	32.yy Replace unsupported black cartridge	✗	✗
Intervention Required - Invalid Refill, Change Cartridge	40309	40 black invalid refill, change cartridge	✗	✗
Intervention Required - Cartridge Part Number Unsupported	40310	32.yy cyan cartridge part number unsupported by device	✗	✗
Intervention Required - Replace unsupported cartridge	40310	32.yy Replace unsupported cyan cartridge	✗	✗
Intervention Required - Invalid Refill, Change Cartridge	40310	40 cyan invalid refill, change cartridge	✗	✗
Intervention Required - Cartridge Part Number Unsupported	40311	32.yy magenta cartridge part number unsupported by device	✗	✗

\* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported ✗ = Not supported			Printer model	
Message	Status code	Return string	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
Intervention Required - Replace unsupported cartridge	40311	32.yy Replace unsupported magenta cartridge	✗	✗
Intervention Required - Invalid Refill, Change Cartridge	40311	40 magenta invalid refill, change cartridge	✗	✗
Intervention Required - Cartridge Part Number Unsupported	40312	32.yy yellow cartridge part number unsupported by device	✗	✗
Intervention Required - Replace unsupported cartridge	40312	32.yy Replace unsupported yellow cartridge	✗	✗
Intervention Required - Invalid Refill, Change Cartridge	40312	40 yellow invalid refill, change cartridge	✗	✗
Intervention Required - Scheduled Maintenance	40315	80 Scheduled maintenance [x] <b>Note:</b> [x] indicates 600k kit.	✗	✗
Intervention Required - Replace Transfer Module	40315	83.yy Replace transfer module	✗	✗
Intervention Required - Replace Fuser	40316	80.yy Replace fuser	✗	✗
Intervention Required - Replace Fuser	40316	87.yy Replace fuser	✗	✗
Intervention Required - Scheduled Maintenance	40316	80 Scheduled maintenance [x] <b>Note:</b> [x] indicates 100k kit.	✗	✗
Intervention Required - Replace Cartridge	40400	31.yy Replace defective or missing cartridge	✗	✗

\* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported ✗ = Not supported			Printer model	
Message	Status code	Return string	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
Intervention Required - Insert Photoconductor	40404	<b>84 Insert photoconductor</b>	✗	✗
Intervention Required -	40404	<b>84 Photoconductor abnormal</b>	✗	✗
Intervention Required - <Color> PC Unit Missing	40405	<b>84.41 Black PC Unit missing</b>	✗	✗
Intervention Required - <Color> Photoconductor Missing	40405	<b>84.41 Black photoconductor missing</b>	✗	✗
Intervention Required - <Color> PC Unit Missing	40406	<b>84.41 Cyan PC Unit missing</b>	✗	✗
Intervention Required - <Color> Photoconductor Missing	40406	<b>84.41 Cyan photoconductor missing</b>	✗	✗
Intervention Required - <Color> PC Unit Missing	40407	<b>84.41 Magenta PC Unit missing</b>	✗	✗
Intervention Required - <Color> Photoconductor Missing	40407	<b>84.41 Magenta photoconductor missing</b>	✗	✗
Intervention Required - <Color> PC Unit Missing	40408	<b>84.41 Yellow PC Unit missing</b>	✗	✗
Intervention Required - <Color> Photoconductor Missing	40408	<b>84.41 Yellow photoconductor missing</b>	✗	✗
Intervention Required - Toner Cartridge Missing	40409	<b>30.yy Black toner cartridge missing</b>	✗	✗
Intervention Required - Defective Cartridge	40409	<b>31.yy Defective black cartridge</b>	✗	✗
Intervention Required - Missing or Defective Cartridge	40409	<b>31.41 Missing or defective black cartridge</b>	✗	✗
Intervention Required - Toner Cartridge Missing	40410	<b>30.yy Cyan toner cartridge missing</b>	✗	✗

\* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
Intervention Required - Defective Cartridge	40410	31.yy Defective cyan cartridge	X	X
Intervention Required - Missing or Defective Cartridge	40410	31.41 Missing or defective cyan cartridge	X	X
Intervention Required - Toner Cartridge Missing	40411	30.yy Magenta toner cartridge missing	X	X
Intervention Required - Defective Cartridge	40411	31.yy Defective magenta cartridge	X	X
Intervention Required - Missing or Defective Cartridge	40411	31.41 Missing or defective magenta cartridge	X	X
Intervention Required - Toner Cartridge Missing	40412	30.yy Yellow toner cartridge missing	X	X
Intervention Required - Defective Cartridge	40412	31.yy Defective yellow cartridge	X	X
Intervention Required - Missing or Defective Cartridge	40412	31.41 Missing or defective yellow cartridge	X	X
Intervention Required - Fuser Missing	40416	80.yy Fuser missing	X	X
Intervention Required - Fuser Missing	40416	87.yy Fuser missing	X	X
Intervention Required - Insert Duplex Pages in Tray <x>	41202	Reload printed pages in Tray <x>	✓	✓

\* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

# PJL messages for paper handling

✓ = Supported ✗ = Not supported			Printer model	
Message	Status code	Return string	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
Intervention Required - Tray <x> Empty	11xyy	Tray <source #> Empty	✗	✗
Intervention Required - Tray <x> Missing	12x01	Tray <source #> Missing	✗	✗
Intervention Required - Bin <x> Full	15ww1	Bin <Bin #> Full	✗	✗
Intervention Required - Wrong Paper Size in Tray <x>	30034	34 Wrong Paper Size in Tray <x>	✗	✗
Intervention Required - Wrong Paper Size Manual Feed	30034	34 Wrong Paper Size Manual Feed	✗	✗
Intervention Required - Remove Paper All Output Bins	40019	Remove Paper All Output Bins	✗	✗
Intervention Required - Remove Paper From All Bins	40019	Remove paper from all bins	✗	✗
Intervention Required - Remove Paper From <bin #>	40019	Remove paper from bin <bin #>	✗	✗
Intervention Required - Remove Paper <linked set bin name>	40019	Remove paper from <linked set bin name>	✗	✗
Intervention Required - Remove Paper From Standard Output Bin	40019	Remove paper from standard output bin	✓	✓
Intervention Required - Remove Paper <linked set bin name>	40019	Remove Paper <linked set bin name>	✗	✗
Intervention Required - Remove Paper Outbin <bin #>	40019	Remove Paper Output Bin <bin #>	✗	✗
Intervention Required - Remove Paper Standard Bin	40019	Remove Paper Standard Bin	✗	✗

✓ = Supported ✗ = Not supported			Printer model	
Message	Status code	Return string	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
Intervention Required - Photoconductor Exposure Warning	40025	Photoconductor exposure warning	✗	✗
Intervention Required - Check <Source> Orientation or Guides	4100x	Check <source> orientation or guides	✗	✗
Intervention Required - Check <Source> Paper Guide	4100x	Check <source> Paper Guide	✗	✗
Intervention Required - Incorrect Media	41xy	Paper changes needed	✗	✗
Intervention Required - Load [src] [Custom Type Name]	41xyy	Load [src] with [Custom Type Name]	✓	✓
Intervention Required - Load [src] [Custom String]	41xyy	Load [src] with [Custom String]	✓	✓
Intervention Required - Load [src] [size]	41xyy	Load [src] with [size]	✓	✓
Intervention Required - Load [src] [type] [size]	41xyy	Load [src] with [type] [size]	✓	✓
Intervention Required - Load Manual [Custom Type Name]	41xyy	Load single sheet feeder with [Custom Type Name]	✓	✓
Intervention Required - Load Manual [Custom String]	41xyy	Load single sheet feeder with [Custom String]	✓	✓
Intervention Required - Load Manual [size]	41xyy	Load single sheet feeder with [size]	✓	✓
Intervention Required - Load Manual [type] [size]	41xyy	Load single sheet feeder with [type] [size]	✓	✓

✓ = Supported ✗ = Not supported			Printer model	
Message	Status code	Return string	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
Intervention Required - Change Request	41xyy	Change <source> <Custom Type Name> <Custom String> <size> <type><size>	✗	✗
Intervention Required - Load Manual Request	41xxxy	Load Manual <Custom Type Name> <Custom String> <size> <type><size>	✗	✗
Intervention Required - Load Manual Request	41xxxy	Load Manual Feeder with <Custom Type Name>	✗	✗
Intervention Required - Load Manual Request	41xxxy	Load Manual Feeder with <Custom String>	✗	✗
Intervention Required - Load Manual Request	41xxxy	Load Manual Feeder with <size>	✗	✗
Intervention Required - Load Manual Request	41xxxy	Load Manual Feeder with <type><size>	✗	✗
Intervention Required - Load Request	41xyy	Load <source> <Custom Type Name> <Custom String> <size> <type><size>	✗	✗
Intervention Required - Load Request	41xyy	Load <source> with <Custom Type Name> <Custom String> with <size> with <type><size>	✗	✗

✓ = Supported X = Not supported			Printer model	
Message	Status code	Return string	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
Intervention Required - Incorrect Media	41xyy	34 Incorrect Media	X	X
Intervention Required - Insert Duplex Pages & Press Go.	412yy	Insert Duplex Pages & Press Go.	X	X
Intervention Required - Insert Tray Request	4300x	Insert Tray <x>	X	X

## PJL messages for paper jams

✓ = Supported X = Not supported		Printer model	
Message	Status code	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
Intervention Required - Paper Jam	4200x	X	X
Intervention Required - Paper Jam	4200z	✓	✓
Intervention Required - Paper Jam	4201x	X	X
Intervention Required - Paper Jam	4201z	✓	✓
Intervention Required - Paper Jam	4202x	X	X
Intervention Required - Paper Jam	4202z	✓	✓
Intervention Required - Paper Jam	4203x	X	X
Intervention Required - Paper Jam	4203z	✓	✓

w indicates this message includes a letter indicating a door or cover that needs to be opened.  
x represents the number of jammed pages in the printer.  
y represents the tray number.  
z represents the bin number.

<b>✓ = Supported</b> <b>X = Not supported</b>		<b>Printer model</b>	
<b>Message</b>	<b>Status code</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
Intervention Required - Paper Jam	4204x	X	X
Intervention Required - Paper Jam	4205x	X	X
Intervention Required - Paper Jam	4206x	X	X
Intervention Required - Paper Jam	4207x	X	X
Intervention Required - Paper Jam	4208x	X	X
Intervention Required - Paper Jam	4209x	X	X
Intervention Required - Paper Jam	4210x	X	X
Intervention Required - Paper Jam	4211x	X	X
Intervention Required - Paper Jam	4220x	X	X
Intervention Required - Paper Jam	4221x	X	X
Intervention Required - Paper Jam	4222x	X	X
Intervention Required - Paper Jam	4230x	X	X
Intervention Required - Paper Jam	4230z	✓	✓
Intervention Required - Paper Jam	4231x	X	X
Intervention Required - Paper Jam	4231z	X	X

w indicates this message includes a letter indicating a door or cover that needs to be opened.  
x represents the number of jammed pages in the printer.  
y represents the tray number.  
z represents the bin number.

<b>✓ = Supported</b> <b>X = Not supported</b>		<b>Printer model</b>	
<b>Message</b>	<b>Status code</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
Intervention Required - Paper Jam	4232x	X	X
Intervention Required - Paper Jam	4233x	X	X
Intervention Required - Paper Jam	4234	X	X
Intervention Required - Paper Jam	424yx	X	X
Intervention Required - Paper Jam	424xz	X	X
Intervention Required - Paper Jam	4241wy	X	X
Intervention Required - Paper Jam	4241z	X	X
Intervention Required - Paper Jam	4242wy	X	X
Intervention Required - Paper Jam	4242z	X	X
Intervention Required - Paper Jam	4243w	X	X
Intervention Required - Paper Jam	4243z	X	X
Intervention Required - Paper Jam	4244wy	X	X
Intervention Required - Paper Jam	4244z	X	X
Intervention Required - Paper Jam	4245w	X	X
Intervention Required - Paper Jam	4246w	X	X

w indicates this message includes a letter indicating a door or cover that needs to be opened.  
x represents the number of jammed pages in the printer.  
y represents the tray number.  
z represents the bin number.

<b>✓ = Supported</b> <b>X = Not supported</b>		<b>Printer model</b>	
<b>Message</b>	<b>Status code</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
Intervention Required - Paper Jam	4247wy	X	X
Intervention Required - Paper Jam	4248w	X	X
Intervention Required - Paper Jam	4249w	X	X
Intervention Required - Paper Jam	4250w	X	X
Intervention Required - Paper Jam	4250x	X	X
Intervention Required - Paper Jam	4250z	✓	✓
Intervention Required - Paper Jam	4251wy	X	X
Intervention Required - Paper Jam	4251x	X	X
Intervention Required - Paper Jam	4252w	X	X
Intervention Required - Paper Jam	4253w	X	X
Intervention Required - Paper Jam	4254wy	X	X
Intervention Required - Paper Jam	4255	X	X
Intervention Required - Paper Jam	4256w	X	X
Intervention Required - Paper Jam	4257w	X	X
Intervention Required - Paper Jam	4258w	X	X

w indicates this message includes a letter indicating a door or cover that needs to be opened.  
x represents the number of jammed pages in the printer.  
y represents the tray number.  
z represents the bin number.

<b>✓ = Supported</b> <b>X = Not supported</b>		<b>Printer model</b>	
<b>Message</b>	<b>Status code</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
Intervention Required - Paper Jam	4259wy	X	X
Intervention Required - Paper Jam	4260w	X	X
Intervention Required - Paper Jam	4260x	X	X
Intervention Required - Paper Jam	4260z	X	X
Intervention Required - Paper Jam	4261w	X	X
Intervention Required - Paper Jam	4261x	X	X
Intervention Required - Paper Jam	427xz	X	X
Intervention Required - Paper Jam	427zx	X	X
Intervention Required - Paper Jam	4271	X	X
Intervention Required - Paper Jam	4271z	X	X
Intervention Required - Paper Jam	4272	X	X
Intervention Required - Paper Jam	4272z	X	X
Intervention Required - Paper Jam	4273	X	X
Intervention Required - Paper Jam	4280w	X	X
Intervention Required - Paper Jam	4280x	X	X

w indicates this message includes a letter indicating a door or cover that needs to be opened.  
x represents the number of jammed pages in the printer.  
y represents the tray number.  
z represents the bin number.

<b>✓ = Supported</b> <b>X = Not supported</b>		<b>Printer model</b>	
<b>Message</b>	<b>Status code</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
Intervention Required - Paper Jam	4280z	X	X
Intervention Required - Paper Jam	4281w	X	X
Intervention Required - Paper Jam	4281x	X	X
Intervention Required - Paper Jam	4281z	X	X
Intervention Required - Paper Jam	4282w	X	X
Intervention Required - Paper Jam	4282x	X	X
Intervention Required - Paper Jam	4282z	X	X
Intervention Required - Paper Jam	4283w	X	X
Intervention Required - Paper Jam	4283x	X	X
Intervention Required - Paper Jam	4283z	X	X
Intervention Required - Paper Jam	4284w	X	X
Intervention Required - Paper Jam	4284x	X	X
Intervention Required - Paper Jam	4284z	X	X
Intervention Required - Paper Jam	4285w	X	X
Intervention Required - Paper Jam	4285z	X	X

w indicates this message includes a letter indicating a door or cover that needs to be opened.  
x represents the number of jammed pages in the printer.  
y represents the tray number.  
z represents the bin number.

<b>✓ = Supported</b> <b>X = Not supported</b>		<b>Printer model</b>	
<b>Message</b>	<b>Status code</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
Intervention Required - Paper Jam	4286w	X	X
Intervention Required - Paper Jam	4286z	X	X
Intervention Required - Paper Jam	4287	X	X
Intervention Required - Paper Jam	4287z	X	X
Intervention Required - Paper Jam	4288	X	X
Intervention Required - Paper Jam	4288z	X	X
Intervention Required - Paper Jam	4289	X	X
Intervention Required - Paper Jam	4289z	X	X
Intervention Required - Paper Jam	4290	X	X
Intervention Required - Paper Jam	4291	X	X
Intervention Required - Paper Jam	4292	X	X
Intervention Required - Paper Jam	4293	X	X
Intervention Required - Paper Jam	4294	X	X
Intervention Required - Paper Jam	4295	X	X

w indicates this message includes a letter indicating a door or cover that needs to be opened.  
x represents the number of jammed pages in the printer.  
y represents the tray number.  
z represents the bin number.

## Service errors

✓ = Supported X = Not supported		Printer model	
Message	Error code	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
ALL SERVICE MESSAGES	50000	X	X

## Device attendance messages

✓ = Supported X = Not supported		Printer model	
Message		C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
RDYMSG	✓	✓	✓
OPMSG	✓	✓	✓
STMSG	✓	✓	✓

## Lexmark-unique PJL commands

✓ = Supported X = Not supported		Printer model	
Command		C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
LADVANCEDSTART	✓	✓	✓
LBEEP	✓	✓	✓
LCLOSEFILE	✓	✓	✓
LDEFFRAG	✓	✓	✓
LDELETEFILE	✓	✓	✓
LDOWNLOADTARGET	✓	✓	✓
LENGINEPRT	✓	✓	✓
LENTERRETAILMODE	✓	✓	✓
LESCAPECHAR	✓	✓	✓
LEXITRETAILMODE	✓	✓	✓

<b>✓ = Supported</b> <b>X = Not supported</b>	<b>Printer model</b>	
<b>Command</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
LFAX PHONENUMBER	X	✓
LFORMAT	✓	✓
LINITIALIZEPRINTER	✓	✓
LOPENFILE	✓	✓
LPORTROTATE	✓	✓
LPRINT testpage	✓	✓
LPRINTDIRECTORY	✓	✓
LPRINTMENUS	✓	✓
LPRINTPCLFONTS	✓	✓
LPRINTPSFONTS	✓	✓
LPRINTTESTPAGE	✓	✓
LPRINTDIAG1TEST	✓	✓
LPRINTDIAG2TEST	✓	✓
LPRINTDIAG3TEST	✓	✓
LREADFILE	✓	✓
LRENAMEFILE	✓	✓
LRUNFILE	✓	✓
LWRITEFILE	✓	✓

## File and device protection commands

<b>✓ = Supported</b> <b>X = Not supported</b>	<b>Printer model</b>	
<b>Command</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
LBYPASSPASSWORD KEY	✓	✓
LDECLARE LRESOURCE	✓	✓
LDELETEPASSWORD	✓	✓

<b>✓ = Supported</b> <b>X = Not supported</b>	<b>Printer model</b>	
<b>Command</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
LQUERYSEED	✓	✓

# Appendix C: PostScript support

## Supplemental operators

<b>Operator name</b>	<b>Printer model</b>
✓ = Supported X = Not supported	
appletalktype	✓
buildtime	✓
byteorder	✓
checkpassword	✓
currentfilenameextend	✓
currentmanualduplexmode	✓
currentuniversalsize	✓
default timeouts	✓
deletefile	✓
devcontrol	✓
devdismount	✓
devforall	✓
devformat	✓
devmount	✓
devstatus	✓
diskonline	✓
diskstatus	✓
displayoperatormsg	✓
doidlefonts	✓
dojamrecovery	✓
doprinterrors	✓
doret	x

<b>✓ = Supported</b> <b>X = Not supported</b>	<b>Printer model</b>	
<b>Operator name</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
dostartpage	✓	✓
dosysstart	✓	✓
duplexer	✓	✓
duplexmode	✓	✓
enginesync	✓	✓
file	✓	✓
filenameforall	✓	✓
fileposition	✓	✓
firstside	✓	✓
fontnonzerowinding	✓	✓
hardwareiomode	✓	✓
idlefonts	✓	✓
ignoresize	✓	✓
initializedisk	✓	✓
jobname	✓	✓
jobsource	✓	✓
jobtimeout	✓	✓
manualfeed	✓	✓
manualfeedtimeout	✓	✓
newsheet	✓	✓
pagecount	✓	✓
pagesprinted	✓	✓
papertray	✓	✓
printername	✓	✓
product	✓	✓
PS2fonts	✓	✓

<b>✓ = Supported</b> <b>X = Not supported</b>	<b>Printer model</b>	
<b>Operator name</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
PS3fonts	✓	✓
quiet	✓	✓
ramsize	✓	✓
realformat	✓	✓
renamefile	✓	✓
resolution	✓	✓
revision	✓	✓
sccbatch	✓	✓
sccinteractive	✓	✓
setcoverpage	x	x
setdefaulttimeouts	✓	✓
setdoidlefonts	✓	✓
setdojamrecovery	✓	✓
setdoprinterrors	✓	✓
setdoret	x	x
setdosstartpage	✓	✓
setdosysstart	✓	✓
setduplexmode	✓	✓
setenginesync	✓	✓
setethernetaddress	✓	✓
setfilenameextend	✓	✓
setfileposition	✓	✓
sethardwareiomode	✓	✓
setidlefonts	✓	✓
setignoresize	✓	✓
setjobtimeout	✓	✓

✓ = Supported ✗ = Not supported		Printer model	
Operator name		C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
setmanualduplexmode	✓	✓	✓
setpapertray	✓	✓	✓
setprintername	✓	✓	✓
setquiet	✓	✓	✓
setresolution	✓	✓	✓
setsccbatch	✓	✓	✓
setsccinteractive	✓	✓	✓
setsoftwareiomode	✓	✓	✓
settumble	✓	✓	✓
setuniversalsize	✓	✓	✓
setuserdiskpercent	✓	✓	✓
softwareiomode	✓	✓	✓
tumble	✓	✓	✓
userdiskpercent	✓	✓	✓
waittimeout	✓	✓	✓

## Page device parameters

✓ = Supported ✗ = Not supported		Printer model	
Key		C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
BeginPage	✓	✓	✓
Collate	✓	✓	✓
DeferredMediaSelection	✓	✓	✓
DeviceRenderingInfo	✓	✓	✓
• AutoMediaType	✓	✓	✓
• ColorBalance	✓	✓	✓

<b>✓ = Supported</b> <b>X = Not supported</b>	<b>Printer model</b>	
<b>Key</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
• ColorCorrection	✓	✓
• ColorSaver	✓	✓
• DefaultPoliciesPageSize	X	X
• EdgeToEdge	✓	✓
• ImageBrightness	✓	✓
• ImageContrast	✓	✓
• ImageEnhancement	✓	✓
• ImageEnhancementType	X	X
• ImageSaturation	✓	✓
• LineDetail	✓	✓
• ManualColor	✓	✓
• PrintDarkness	✓	✓
• PictureGrade	X	X
• PrintQuality	X	X
• Screening	X	X
- ColorGrade	X	X
- IET	X	X
- IETImagesOnly	X	X
- IETPictureGrade	X	X
- None	X	X
- PictureGrade	X	X
• SubstituteSize	✓	✓
• TonerSaver	✓	✓
• Type	✓	✓
Duplex	✓	✓
EndPage	✓	✓
ExitJamRecovery	✓	✓
HWResolution	✓	✓

<b>✓ = Supported</b> <b>X = Not supported</b>	<b>Printer model</b>	
<b>Key</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
ImagingBBox	✓	✓
InputAttributes	✓	✓
• 0 - Tray 1	✓	✓
• 1 - Tray 2	✓	✓
• 2 - Envelope Feeder	✓	✓
• 3 - Tray 3	✓	✓
• 4 - Multipurpose Feeder	✓	✓
• 5 - Tray 4	✓	✓
• 6 - Tray 5	✓	✓
- InputLocation	✓	✓
- MatchAll	✓	✓
- MediaColor	✓	✓
- MediaType	✓	✓
- MediaWeight	✓	✓
- PageSize	✓	✓
• Mode	✓	✓
• Priority	✓	✓
Install	✓	✓
Jog	✓	✓
ManualFeed	✓	✓
ManualFeedTimeout	✓	✓
MediaColor	✓	✓
MediaPosition	✓	✓
MediaType	✓	✓
MediaWeight	✓	✓
NumCopies	✓	✓

<b>✓ = Supported</b> <b>X = Not supported</b>	<b>Printer model</b>	
<b>Key</b>	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
Nup	✓	✓
NupDetails	✓	✓
• Border	✓	✓
• Columns	✓	✓
• LandscapeOverride	✓	✓
• Order	✓	✓
• Orientation	✓	✓
• Rows	✓	✓
• Type	✓	✓
OutputAttributes	✓	✓
• 0 - Standard Bin	✓	✓
- OutputLocation	✓	✓
- OutputType	✓	✓
- Priority	✓	✓
OutputPage	✓	✓
OutputType	✓	✓
PageDeviceName	✓	✓
PageSize	✓	✓
Policies	✓	✓
• PolicyNotFound	✓	✓
• PolicyReport	✓	✓
• PageSize	✓	✓
PostRenderingEnhance	X	X
PostRenderingEnhanceDetails	X	X
• REValue	X	X
• Type	X	X
PowerSave	✓	✓

✓ = Supported ✗ = Not supported		Printer model	
Key		C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
ProcessColorModel	✗	✗	✗
Punch	✗	✗	✗
SlipSheet	✗	✗	✗
SlipSheetDetails	✓	✓	✓
• SlipSheetSource	✓	✓	✓
• Type	✓	✓	✓
Staple	✗	✗	✗
TraySwitch	✓	✓	✓
Tumble	✓	✓	✓
UniversalDetails	✓	✓	✓

## User interpreter parameters

✓ = Supported ✗ = Not supported		Printer model	
Key	Default	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
AccurateScreens	false	✓	✓
CollatedCopies	Collation - Collated Copies (QTY) value	✓	✓
HalftoneMode	0	✓	✓
IdiomRecognition	true	✓	✓
JobName	()	✓	✓
JobTimeout	JobTimeout system parameter	✓	✓
MaxDictStack	255	✓	✓
MaxExecStack	10015	✓	✓
MaxFontItem	12500	✓	✓
MaxFormItem	100000	✓	✓
MaxLocalVM	2147483647	✓	✓

✓ = Supported ✗ = Not supported		Printer model	
Key	Default	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
MaxOpStack	100000	✓	✓
MaxPatternItem	20000	✓	✓
MaxScreenItem	48000	✓	✓
MaxSuperScreen	1024	✓	✓
MaxUPathItem	5000	✓	✓
MinFontCompress	2147483647	✓	✓
PageCount	0	✓	✓
UseOldcopypage	false	✓	✓
VMReclaim	0	✓	✓
VMThreshold	25000 per MB of RAM	✓	✓
WaitTimeout	WaitTimeout system parameter	✓	✓

## System interpreter parameters

✓ = Supported ✗ = Not supported		Printer model	
Key		C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
BuildTime		✓	✓
ByteOrder		✓	✓
CurDisplayList		✓	✓
CurFontCache		✓	✓
CurFormCache		✓	✓
CurInputDevice		✓	✓
CurOutlineCache		✓	✓
CurOutputDevice		✓	✓
CurPatternCache		✓	✓

<b>Key</b>	<b>Printer model</b>	
	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
CurScreenStorage	✓	✓
CurSourceList	✓	✓
CurUPathCache	✓	✓
DisableFastProcs	✓	✓
DoPrintErrors	✓	✓
DoStartPage	✓	✓
EnableExtraFonts	✓	✓
EngineBoot	✓	✓
EngineCode	✓	✓
EngineSpeed	✓	✓
EnvironmentSave	✓	✓
FactoryDefaults	✓	✓
FatalErrorAddress	✓	✓
FontResourceDir	✓	✓
FontVersion	✓	✓
GenericResourceDir	✓	✓
GenericResourcePathSep	✓	✓
InstalledRam	✓	✓
JobTimeout	✓	✓
languagelevel	✓	✓
MaxDisplayList	✓	✓
MaxDisplayAndSourceList	✓	✓
MaxFontCache	✓	✓
MaxFormCache	✓	✓
MaxImageBuffer	✓	✓
MaxOutlineCache	✓	✓

<b>✓ = Supported</b> <b>X = Not supported</b>	<b>Printer model</b>	
<b>Key</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
MaxPatternCache	✓	✓
MaxPermanentVM	✓	✓
MaxRasterMemory	✓	✓
MaxScreenStorage	✓	✓
MaxSourceList	✓	✓
MaxUPathCache	✓	✓
PageCount	✓	✓
PanelCode	✓	✓
PrinterCode	✓	✓
PrinterName	✓	✓
RamSize	✓	✓
RealFormat	✓	✓
Revision	✓	✓
SearchBuiltinFontsFirst	✓	✓
SerialNumber	✓	✓
StartJobPassword	✓	✓
StartupMode	✓	✓
StaticRamSize	✓	✓
SystemParamsPassword	✓	✓
UseOldcopypage	✓	✓
UseOldfonts	✓	✓
ValidNV	✓	✓
WaitTimeout	✓	✓

## Devices supported

<b>Device</b>	<b>Printer model</b>
%AppSocketA%	✓
%AppSocketB%	✓
%AppSocketC%	✓
%AppSocketD%	✓
%EthernetPhysicalA%	✓
%EthernetPhysicalB%	✓
%EthernetPhysicalC%	✓
%EthernetPhysicalD%	✓
%EtherTalkA%	✓
%EtherTalkB%	✓
%EtherTalkC%	✓
%EtherTalkD%	✓
%IP_A%	✓
%IP_B%	✓
%IP_C%	✓
%IP_D%	✓
%IR_A%	X
%IR_B%	X
%IR_C%	X
%IR_D%	X
%LexLinkA%	✓
%LexLinkB%	✓
%LexLinkC%	✓
%LexLinkD%	✓
%LocalTalkA%	✓

<b>✓ = Supported</b> <b>X = Not supported</b>	<b>Printer model</b>	
<b>Device</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
%LocalTalkB%	✓	✓
%LocalTalkC%	✓	✓
%LocalTalkD%	✓	✓
%LPR_A%	✓	✓
%LPR_B%	✓	✓
%LPR_C%	✓	✓
%LPR_D%	✓	✓
%ParallelA%	X	X
%ParallelB%	X	X
%ParallelC%	X	X
%ParallelD%	X	X
%PrintServerA%	✓	✓
%PrintServerB%	✓	✓
%PrintServerC%	✓	✓
%PrintServerD%	✓	✓
%RemotePrinterA%	✓	✓
%RemotePrinterB%	✓	✓
%RemotePrinterC%	✓	✓
%RemotePrinterD%	✓	✓
%SerialA%	X	X
%SerialB%	X	X
%SerialC%	X	X
%SerialD%	X	X
%TokenRingPhysicalA%	X	X
%TokenRingPhysicalB%	X	X
%TokenRingPhysicalC%	X	X
%TokenRingPhysicalD%	X	X
%TokenTalkA%	X	X

<b>✓ = Supported</b> <b>X = Not supported</b>	<b>Printer model</b>	
<b>Device</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
%TokenTalkB%	X	X
%TokenTalkC%	X	X
%TokenTalkD%	X	X
%USB_A%	✓	✓
%USB_B%	✓	✓
%USB_C%	✓	✓
%USB_D%	✓	✓

## Device parameters

<b>✓ = Supported</b> <b>X = Not supported</b>	<b>Printer model</b>	
<b>Key</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
<b>Device Parameters for the Communication Device %Parallel%, %ParallelA%, %ParallelB%, %ParallelC%, %ParallelD%</b>		
DelayedOutputClose	X	X
Enabled	X	X
Filtering	X	X
Handshake	X	X
HasNames	X	X
Interpreter	X	X
On	X	X
OutputDevice	X	X
PCLSmartSwitch	X	X
PortLocation	X	X
PSSmartSwitch	X	X
Type	X	X
<b>Device Parameters for the Communication Device %Serial%, %SerialA%, %SerialB%, %SerialC%, %SerialD%</b>		
Baud	X	X
CheckParity	X	X

<b>✓ = Supported</b> <b>X = Not supported</b>	<b>Printer model</b>	
<b>Key</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
DataBits	X	X
DelayedOutputClose	X	X
Enabled	X	X
Filtering	X	X
FlowControl	X	X
HasNames	X	X
HonorDSR	X	X
Interpreter	X	X
On	X	X
Parity	X	X
PCLSmartSwitch	X	X
PortLocation	X	X
PSSmartSwitch	X	X
RobustXon	X	X
SerialMode	X	X
StopBits	X	X
Type	X	X
<b>Device Parameters for the Communication Device %LocalTalk%, %LocalTalkA%, %LocalTalkB%, %LocalTalkC%, %LocalTalkD%</b>		
DelayedOutputClose	✓	✓
Enabled	✓	✓
Filtering	✓	✓
HasNames	✓	✓
Interpreter	✓	✓
LocalTalkType	✓	✓
NodeID	✓	✓
On	✓	✓
PCLSmartSwitch	✓	✓
PortLocation	✓	✓
PSSmartSwitch	✓	✓

<b>✓ = Supported</b> <b>X = Not supported</b>	<b>Printer model</b>	
<b>Key</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
Type	✓	✓
<b>Device Parameters for the Communication Device %EtherTalk%, %EtherTalkA%, %EtherTalkB%, %EtherTalkC%, %EtherTalkD%</b>		
DelayedOutputClose	✓	✓
Enabled	✓	✓
EthernetAddress	✓	✓
EtherTalkType	✓	✓
EtherTalkZone	✓	✓
Filtering	✓	✓
HasNames	✓	✓
Interpreter	✓	✓
NodeID	✓	✓
On	✓	✓
PCLSmartSwitch	✓	✓
PortLocation	✓	✓
PSSmartSwitch	✓	✓
Type	✓	✓
<b>Device Parameters for the Communication Device %IR%, %IR_A%, %IR_B%, %IR_C%, %IR_D%</b>		
DelayedOutputClose	X	X
Enabled	X	X
Filtering	X	X
HasNames	X	X
Interpreter	X	X
On	X	X
PCLSmartSwitch	X	X
PortLocation	X	X
PSSmartSwitch	X	X
Type	X	X

<b>✓ = Supported</b> <b>X = Not supported</b>	<b>Printer model</b>	
<b>Key</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
<b>Device Parameters for the Communication Device %USB%, %USB_A%, %USB_B%, %USB_C%, %USB_D%</b>		
DelayedOutputClose	✓	✓
Enabled	✓	✓
Filtering	✓	✓
HasNames	✓	✓
Interpreter	✓	✓
On	✓	✓
PCLSmartSwitch	✓	✓
PortLocation	✓	✓
PSSmartSwitch	✓	✓
Type	✓	✓
<b>Device Parameters for the Communication Device %TokenTalk%, %TokenTalkA%, %TokenTalkB%, %TokenTalkC%, %TokenTalkD%</b>		
Address	X	X
Bridging	X	X
DelayedOutputClose	X	X
Enabled	X	X
Filtering	X	X
HasNames	X	X
Interpreter	X	X
NodeID	X	X
On	X	X
PCLSmartSwitch	X	X
PortLocation	X	X
PSSmartSwitch	X	X
TokenTalkType	X	X
Type	X	X
Zone	X	X

<b>✓ = Supported</b> <b>X = Not supported</b>	<b>Printer model</b>	
<b>Key</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
<b>Device Parameters for the Communication Device %AppSocket%, %AppSocketA%, %AppSocketB%, %AppSocketC%, %AppSocketD%</b>		
DelayedOutputClose	✓	✓
Enabled	✓	✓
Filtering	✓	✓
HasNames	✓	✓
Interpreter	✓	✓
On	✓	✓
PortLocation	✓	✓
Type	✓	✓
<b>Device Parameters for the Communication Device %RemotePrinter%, %RemotePrinterA%, %RemotePrinterB%, %RemotePrinterC%, %RemotePrinterD%</b>		
DelayedOutputClose	✓	✓
Enabled	✓	✓
Filtering	✓	✓
HasNames	✓	✓
Interpreter	✓	✓
On	✓	✓
PortLocation	✓	✓
Type	✓	✓
<b>Device Parameters for the Communication Device %PrintServer%, PrintServerA%, PrintServerB%, %PrintServerC%, %PrintServerD%</b>		
DelayedOutputClose	✓	✓
Enabled	✓	✓
Filtering	✓	✓
HasNames	✓	✓

<b>✓ = Supported</b> <b>X = Not supported</b>	<b>Printer model</b>	
<b>Key</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
Interpreter	✓	✓
On	✓	✓
PortLocation	✓	✓
Type	✓	✓
<b>Device Parameters for the Communication Device %LPR%, %LPR_A%, %LPR_B%, %LPR_C%, %LPR_D%</b>		
Enabled	✓	✓
Filtering	✓	✓
HasNames	✓	✓
Interpreter	✓	✓
On	✓	✓
PortLocation	✓	✓
Type	✓	✓
<b>Device Parameters for the Communication Device %LexLink%, %LexLinkA%, %LexLinkB%, %LexLinkC%, %LexLinkD%</b>		
DelayedOutputClose	✓	✓
Enabled	✓	✓
HasNames	✓	✓
Interpreter	✓	✓
On	✓	✓
PortLocation	✓	✓
Type	✓	✓
<b>Device Parameters for the Communication Device %IP%, %IP_A%, %IP_B%, %IP_C%, %IP_D%</b>		
GatewayAddress	✓	✓
IPAddress	✓	✓
IPAddressDynamic	✓	✓
NetworkMask	✓	✓

Key ✓ = Supported ✗ = Not supported		Printer model	
Key		C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
On	✓	✓	✓
Physical	✓	✓	✓
PortLocation	✓	✓	✓
Type	✓	✓	✓
<b>Device Parameters for the Communication Device</b> %EthernetPhysical%, %EthernetPhysicalA%, %EthernetPhysicalB%, %EthernetPhysicalC%, %EthernetPhysicalD%			
EthernetAddress	✓	✓	✓
On	✓	✓	✓
PortLocation	✓	✓	✓
Type	✓	✓	✓
<b>Device Parameters for the Communication Device</b> %TokenRingPhysical%, %TokenRingPhysicalA%, %TokenRingPhysicalB%, %TokenRingPhysicalC%, %TokenRingPhysicalD%			
Address	✗	✗	✗
On	✗	✗	✗
PortLocation	✗	✗	✗
Speed	✗	✗	✗
Type	✗	✗	✗
<b>Device Parameters for the Parameters Device %Engine%</b>			
BSizeStandard	✓	✓	✓
Darkness	✓	✓	✓
PageCount	✓	✓	✓
TimeToStandby	✓	✓	✓
Type	✓	✓	✓
<b>Device Parameters for the Parameters Device %Console%</b>			
Language	✓	✓	✓
Type	✓	✓	✓

<b>✓ = Supported</b> <b>X = Not supported</b>	<b>Printer model</b>	
<b>Key</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
<b>Device Parameters for the Parameters Device %Calendar%, %CalendarA%, %CalendarB%, %CalendarC%, %CalendarD%</b>		
Day	✓	✓
Hour	✓	✓
Minute	✓	✓
Month	✓	✓
Running	✓	✓
Second	✓	✓
Type	✓	✓
Year	✓	✓
DateTime	✓	✓
DayOfWeekLong	✓	✓
DayOfWeekNum	✓	✓
DayOfWeekShort	✓	✓
<b>Device Parameters for the Parameters Device %disk1%</b>		
BlockSize	X	X
Free	X	X
HasNames	X	X
InitializeAction	X	X
LogicalSize	X	X
Mounted	X	X
PhysicalSize	X	X
Removable	X	X
Searchable	X	X
SearchOrder	X	X
Type	X	X
Writable	X	X
<b>Device Parameters for the Parameters Device %flash1%</b>		
BlockSize	✓	✓

<b>✓ = Supported</b> <b>X = Not supported</b>	<b>Printer model</b>	
<b>Key</b>	<b>C540n, C543dn, C544n/dn/dw/dtn</b>	<b>X546dtn MFP</b>
Free	✓	✓
HasNames	✓	✓
InitializeAction	✓	✓
LogicalSize	✓	✓
Mounted	✓	✓
PhysicalSize	✓	✓
Removable	✓	✓
Searchable	✓	✓
SearchOrder	✓	✓
Type	✓	✓
Writable	✓	✓
<b>Device Parameters for the Parameters Device %rom%</b>		
BlockSize	✓	✓
Free	✓	✓
HasNames	✓	✓
InitializeAction	✓	✓
LogicalSize	✓	✓
Mounted	✓	✓
PhysicalSize	✓	✓
Removable	✓	✓
Searchable	✓	✓
SearchOrder	✓	✓
Type	✓	✓
Writable	✓	✓

## PostScript message keys commands

✓ = Supported X = Not supported	Printer model	
Key	C540n, C543dn, C544n/dn/dw/dtn	X546dtn MFP
job	✓	✓
status	✓	✓
source	✓	✓

# Index

## A

air temperature ranges 20  
airflow requirement 17  
altitude specifications 20  
atmospheric pressure 21

## C

clearance requirements 20  
commands  
PJL, file and device protection 77  
PJL, Lexmark-unique 76  
PostScript, message keys 101  
commands supported  
GL/2 28  
PCL emulation 22  
PJL, common variables for both languages 32  
PJL, common variables for PCL emulation 41  
PJL, common variables for PostScript emulation 42  
PJL, Status Readback 43  
PJL, unique variables for both languages 34  
PJL, unique variables for LRESOURCE 43  
PJL, unique variables for PCL emulation 41  
PJL, unique variables for PostScript emulation 42  
PJL, USTATUS variables 43

## D

devices supported  
PostScript 90  
dimensions, printer 19

## E

electrical specifications 18  
envelope sizes  
support in PostScript 14  
envelope sizes supported  
Lexmark X264 9  
Lexmark X36x 9  
Lexmark X46x 9  
envelope tray support  
PostScript operators 15

environmental conditions 20  
errors  
PJL, service 76

## F

finding information  
customer support 7  
publications 7

## G

GL/2  
commands supported 28

## H

humidity ranges 20

## L

letter meanings 5  
logical page  
PCL emulation 8

## M

meanings, letters after model number 5  
messages  
PJL, attendance conditions 50  
PJL, auto-continuable conditions 44  
PJL, device attendance 76  
PJL, paper handling 66  
PJL, paper jams 69  
model numbers  
understanding letters 5

## N

noise emission levels 17  
notices 2

## O

operators, envelope sizes  
PostScript 14

## P

page, printable  
PCL emulation 8

paper sizes supported

Lexmark X264 9  
Lexmark X36x 9  
Lexmark X46x 9  
paper sizes, PostScript  
supported by printer 12  
paper tray  
operators, PostScript 13, 14  
support in PostScript 13

parameters  
PostScript, device 92  
PostScript, page device 82  
PostScript, system interpreter 87  
PostScript, user interpreter 86

PCL emulation  
commands supported 22  
PCL emulation, paper and envelope dimensions

Lexmark X264 9  
Lexmark X36x 9  
Lexmark X46x 9  
physical page  
PCL emulation 8  
physical specifications 19  
PJL commands  
common variables, both languages 32  
common variables, PCL emulation 41  
common variables, PostScript emulation 42  
file and device protection 77  
Lexmark-unique 76  
Status Readback 43  
unique variables, both languages 34

unique variables, LRESOURCE 43  
unique variables, PCL  
emulation 41  
unique variables, PostScript  
emulation 42  
USTATUS variables 43

PJL commands, information location  
Printer Languages and Interfaces  
Technical Reference 11  
PJL errors  
service errors 76

PJL messages  
attendance conditions 50  
auto-continuable conditions 44  
device attendance 76  
paper handling 66  
paper jams 69

PostScript  
device parameters 92  
devices supported 90  
operators, envelope sizes 14  
page device parameters 82  
supplemental operators 79  
supported paper sizes 12  
tray operators 13

PostScript commands  
message keys 101

PostScript operators  
envelope tray support 15

PostScript parameters  
system interpreter 87  
user interpreter 86

power requirements 18  
printable areas 8  
printer specifications 19  
airflow requirement 17  
altitude 20  
atmospheric pressure 21  
clearance requirements 20  
electrical 18  
environmental conditions 20  
noise emission levels 17  
power requirements 18

## R

required clearance 20

## S

size, printer 19  
supplemental operators  
PostScript 79

## T

tray operators  
PostScript 13

## W

weight, printer 19